

# MonoChlorobenzene Separation Process

Ana Paula Ribeiro Paiva


Department of Chemical and Petroleum Engineering,  
Universidade Federal Fluminense, 24210-240, Niterói, RJ, Brazil

## Background & Description:

MonoChlorobenzene is an important intermediate in the production of waxes, rubbers, and, pharmaceutical products, among others. Its production occurs mostly from the chlorination of benzene, which produces a stream of benzene (BEN), monochlorobenzene (MCB) and chloridric acid (HCl). A secondary plant to separate these components was simulated and presented in the “Flowsheet” section, based on data from Seider *et al.* [1]. Wilson’s Fluid Package was used to describe the equilibrium and thermodynamic relationships. According to Seider, this stream consists of 10% HCl, 40% BEN and 50% MCB, with a flow rate of 100 lbmol/hr, 80 °F and 37 psia. At the end of the process, the overhead outlet stream from the distillation column must have a MCB flow rate of 0.1 lbmol/hr and the bottom outlet stream must have a MCB mole fraction equals to 1.0.

The initial stream (S-01), after being heated, passes through a flash vessel. Then, the flash’s top stream is sent to an absorber column with 3 theoretical stages and 32 psia. The absorber column and the flash vessel bottom products are mixed and treated for total HCl removal. The S-10 stream components (MCB and BEN) can be separated by a distillation column with 20 theoretical stages and a pressure of 25 psia. The bottom stream from DC-01, constituted mostly of MCB, is divided and part of it is pressurized and recycled to the absorber column.

## Flowsheet:

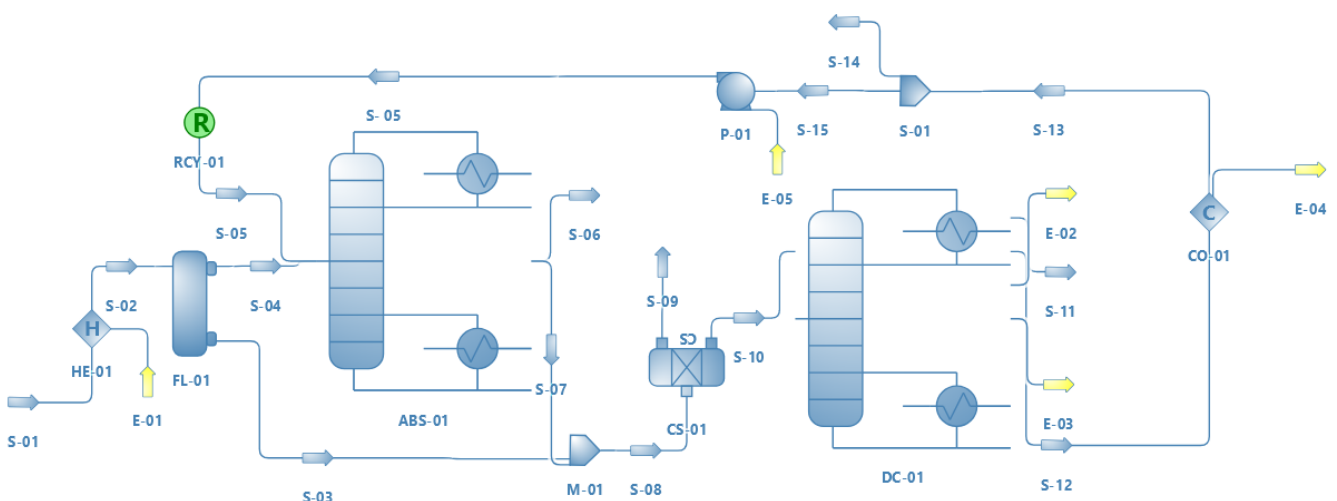

**MonoChloroBenzene Separation Process Flowsheet**

## Results:

Stream	S-01	S-05	S-06	S-10	S-11	S-12	S-14
Temperature [F]	80	120	137	256	209	307	120
Pressure [psia]	37	32	32	32	25	25	25
Molar Flow [lbmol/hr]	100	99.2	9.81	188.9	40.1	148.8	49.5
<b>Molar Composition</b>							
HCl	0.10	0.00	0.96	0.00	0.00	0.00	0.00
BEN	0.40	0.00	0.00	0.21	0.99	0.00	0.00
MCB	0.50	1.00	0.04	0.79	0.01	1.00	1.00

Table 1. Main Streams Results

Object	E-01	E-03	E-05	E-02	E-04
Energy Flow [kW]	342.5	1112.3	0.084	1036.9	334.5
Utility Source	Steam (mps)*	Steam (mps)*	Electrical	Cooling water	Cooling water

\*medium pressure steam

Table 2. Energy Results

## Conclusion & Recommendations:

The simulated MCB separation process on DWSIM software (v6.7.1) presented results similar to the reference [1]. It can be observed that S-11 and S-14 streams have purities of 99% of BEN and MCB, respectively.

This process presents a total energy consumption (electrical and steam) of 1454.9 kW and requires the removal of 1371.4 kW (cooling water) from the condensers.

It can be seen that the bottom stream (S-12) from the distillation column has a high temperature (306 °F), which requires its cooling by the condenser (CO-01). As the initial stream (S-01) must be heated, it is possible to do a heat integration, taking advantage of the S-12 temperature. That is an improvement possibility on the process to be studied in the future.

## References:

[1] Seider, W. D., Lewin, D. R., Seader, J. D., Widagdo, S., Gani, R., Ming Ng, K., (2016), *Product and Process Design Principles: Synthesis, Analysis and Evaluation*, 4<sup>o</sup> ed., John Wiley & Sons, West Sussex.