

Scilab Textbook Companion for
Optical Fiber Communications - Principles
And Practice
by J. M. Senior¹

Created by
Mohammad Faisal Siddiqi
B.TECH (ELECTRONICS & COMMUNICATION)
Electronics Engineering
JAMIA MILLIA ISLAMIA, NEW DELHI
College Teacher
Not Decided
Cross-Checked by

August 17, 2013

¹Funded by a grant from the National Mission on Education through ICT,
<http://spoken-tutorial.org/NMEICT-Intro>. This Textbook Companion and Scilab
codes written in it can be downloaded from the "Textbook Companion Project"
section at the website <http://scilab.in>

Book Description

Title: Optical Fiber Communications - Principles And Practice

Author: J. M. Senior

Publisher: Pearson Education, New Delhi

Edition: 2

Year: 2007

ISBN: 81-317-0309-6

Scilab numbering policy used in this document and the relation to the above book.

Exa Example (Solved example)

Eqn Equation (Particular equation of the above book)

AP Appendix to Example(Scilab Code that is an Appednix to a particular Example of the above book)

For example, Exa 3.51 means solved example 3.51 of this book. Sec 2.3 means a scilab code whose theory is explained in Section 2.3 of the book.

Contents

List of Scilab Codes	5
2 OPTICAL FIBER WAVEGUIDES	12
3 TRANSMISSION CHARACTERISTICS OF OPTICAL FIBERS	24
4 OPTICAL FIBERS AND CABLES	40
5 OPTICAL FIBER CONNECTIONS JOINTS COUPLERS AND ISOLATORS	42
6 OPTICAL SOURCES 1 THE LASER	53
7 OPTICAL SOURCES 2 THE LIGHT EMITTING DIODE	61
8 OPTICAL DETECTORS	69
9 DIRECT DETECTION RECEIVER PERFORMANCE CONSIDERATIONS	78
10 OPTICAL AMPLIFICATION WAVELENGTH CONVERSION AND REGENERATION	89
11 INTEGRATED OPTICS AND PHOTONICS	95
12 OPTICAL FIBER SYSTEMS 1 INTENSITY MODULATION AND DIRECT DETECTION	100
13 OPTICAL FIBER SYSTEMS 2 COHERENT AND PHASE MODULATED	129

List of Scilab Codes

Exa 2.1	Determination of Critical Angle NA and Acceptance Angle	12
Exa 2.2	Determination of NA Solid Acceptance Angle and the Critical Angle	13
Exa 2.3	Comparision of Acceptance Angle for Meridional Rays and Skew Rays	14
Exa 2.4	Estimation of Normalized Frequency and Number of Guided Modes	15
Exa 2.5	Estimation of total number of Guided Modes propagating in the fiber	16
Exa 2.6	Estimation of maximum and new core diameter for given relative refractive index differences	17
Exa 2.7	Estimation of maximum core diameter of an optical fiber which allows single mode operation	18
Exa 2.8	Estimation of cutoff wavelength for a step index fiber to exhibit single mode operation	19
Exa 2.9	Deduction of an approximation for the normalized propagation constant	20
Exa 2.10	Estimation of fiber core diameter for a single mode step index fiber	20
Exa 2.11	Determination of spot size at the operating wavelength using ESI technique	21
Exa 2.12	Determination of relative refractive index difference using ESI technique	22
Exa 3.1	Determination of signal attenuation under different cases and numerical input by output power ratio	24
Exa 3.2	Determination of theoretical attenuation per kilometer due to fundamental Rayleigh scattering	25

Exa 3.3	Comparision of threshold optical powers for SBS and SRS	27
Exa 3.4	Estimation of critical radius of curvature	28
Exa 3.5	Estimation of Maximum Bandwidth Pulse dispersion per unit length and BW Length product	29
Exa 3.6	Determination of Material Dispersion Parameter and RMS Pulse Broadening	30
Exa 3.7	Estimation of RMS Pulse Broadening per kilometer for the fiber	31
Exa 3.8	Estimation of Delay Difference RMS Pulse Broadening Maximum Bit Rate and BW Length product	32
Exa 3.9	Comparision of RMS Pulse Broadening per Kilometer for two cases	33
Exa 3.10	Estimation of total RMS pulse broadening and BW Length product	34
Exa 3.11	Comparision of total first order dispersion for the fiber	36
Exa 3.12	Determination of Modal birefringence coherence length and difference between propagation constants	37
Exa 3.13	Determination of fiber birefringence for two given cases	38
Exa 3.14	Determination of mode coupling parameter for the fiber	39
Exa 4.1	Estimation of fracture stress for the fiber and percentage strain at the break	40
Exa 5.1	Calculation of the optical loss in decibels at the joint	42
Exa 5.2	Estimation of the insertion loss in two given cases	43
Exa 5.3	Estimation of the insertion loss in two given cases	44
Exa 5.4	Estimation of the insertion loss in two given cases	45
Exa 5.5	Estimation of the total insertion loss of the fiber joint with a lateral and angular misalignment	46
Exa 5.6	Calculation of the loss at the connection due to mode field diameter mismatch	47
Exa 5.7	Determination of excess loss insertion losses crosstalk and split ratio	48
Exa 5.8	Determination of excess loss insertion losses crosstalk and split ratio	49
Exa 5.9	Determination of the insertion loss associated with one typical path	50
Exa 5.10	Calculation of the grating period for reflection	51

Exa 6.1	Calculation of the ratio of stimulated emission rate to the spontaneous emission rate	53
Exa 6.2	Determination of the number of longitudinal modes and their frequency separation in a ruby laser	54
Exa 6.3	Calculation of laser gain coefficient for the cavity	55
Exa 6.4	Comparision of the approximate radiative minority carrier lifetimes in GaAs and Si	55
Exa 6.5	Determination of the threshold current density and the threshold current for the device	56
Exa 6.6	Calculation of external power efficiency of the device . .	57
Exa 6.7	Comparision of the ratio of threshold current densities at 20 C and 80 C for AlGaAs and InGaAsP	58
Exa 6.8	Determination of RMS value of the power fluctuation and RMS noise current at the output of the detector . .	59
Exa 7.1	Determination of total carrier recombination lifetime and the power internally generated within the device . .	61
Exa 7.2	Calculation of optical power emitted into air as a percentage of internal optical power and the external power efficiency	62
Exa 7.3	Calculation of Coupling Efficiency and Optical loss in decibels relative to Pe and Pint	63
Exa 7.4	Estimation of the optical power coupled into the fiber	64
Exa 7.5	Determination of the overall power conversion efficiency	65
Exa 7.6	Comparision of electrical and optical bandwidth for an optical fiber commuication system	66
Exa 7.7	Determination of optical output power modulated at frequencies of 20 MHz and 100 MHz	66
Exa 7.8	Estimation of the CW operating lifetime for the given LED	68
Exa 8.1	Determination of the quantum efficiency and responsivity of the photodiode	69
Exa 8.2	Determination of operating wavelength and incident optical power	70
Exa 8.3	Determination of wavelength above which an intrinsic photodetector will cease to operate	71
Exa 8.4	Determination of drift time of the carriers and junction capacitance of the photodiode	72
Exa 8.5	Determination of maximum response time for the device	73

Exa 8.6	Calculation of noise equivalent power and specific detectivity for the device	74
Exa 8.7	Determination of the multiplication factor of the photodiode	75
Exa 8.8	Determination of optical gain of the device and common emitter current gain	76
Exa 8.9	Determination of the maximum 3 dB bandwidth permitted by the device	77
Exa 9.1	Determination of the theoretical quantum limit at the receiver and the minimum incident optical power . . .	78
Exa 9.2	Calculation of incident optical power to achieve given SNR	79
Exa 9.3	Comparision of the shot noise generated in the photodetector with the thermal noise in the load resistor . . .	80
Exa 9.4	Determination of SNR at the output of the receiver . .	81
Exa 9.5	Calculation of maximum load resistance and bandwidth penalty considering amplifier capacitance	83
Exa 9.6	Determination of the maximum SNR improvement . .	84
Exa 9.7	Determination of the optimum avalanche multiplication factor	85
Exa 9.8	Determination of Maximum bandwidth Mean square thermal noise current for high input impedance and transimpedance amplifier	86
Exa 10.1	Determination of Refractive Index of active medium and 3dB Spectral Bandwidth	89
Exa 10.2	Derivation of an approximate equation for the cavity gain of an SOA	90
Exa 10.3	Determination of the length of the device and the ASE noise signal power at the output of the amplifier . . .	91
Exa 10.4	Determination of the fiber non linear coefficient and the parametric gain in dB when it is reduced to quadratic gain	92
Exa 10.5	Calculation of the frequency chirp variation at the output signal and the differential gain required	93
Exa 11.1	Determination of Voltage required to provide pi radians phase change	95
Exa 11.2	Determination of Corrugation Period and Filter 3dB Bandwidth	96

Exa 11.3	Design of a wavelength channel plan for a dense WDM Interleaver Waveband Filter	97
Exa 12.1	Determination of bit rate and duration of a Time slot Frame and Multiframe	100
Exa 12.2	Determination of required electrical and optical SNR . .	101
Exa 12.3	Estimation of the average number of photons which must be incident on the APD to register a binary one	102
Exa 12.4	Estimation of incident optical power to register binary 1 at bit rates of 10 Mbps and 140 Mbps	103
Exa 12.5	Determination of the total channel loss ignoring dispersion	104
Exa 12.6	Estimation of the dispersion equalization penalty for bit given rates	105
Exa 12.7	Estimation of the maximum bit rate that may be achieved on the link when using NRZ format	106
Exa 12.8	Estimation of maximum possible link length without repeaters when operating at 35 Mbps and 400 Mbps . .	107
Exa 12.9	Determination of the viability of optical power budget .	109
Exa 12.10	Estimation of ratio of SNR of the coaxial system to the SNR of the fiber system	110
Exa 12.11	Determination of the average incident optical power required at the receiver	111
Exa 12.12	Determination of the average incident optical power required to maintain given SNR	112
Exa 12.13	Determination of the viability of optical power budget and estimation of any possible increase in link length .	114
Exa 12.14	Determination of whether the combination of components gives an adequate temporal response	115
Exa 12.15	Derivation of an expression for the improvement in post detection SNR and determination of the improvement in post detection SNR and Bandwidth	117
Exa 12.16	Program to determine the ratio of SNRs of FM IM and PM IM systems	118
Exa 12.17	Calculation of the optimum receiver bandwidth and the peak to peak signal power to rms noise ratio	119
Exa 12.18	Formation of comparision showing total channel loss against number of nodes for Bus and Star Distribution Systems	120

Exa 12.19	Estimation of the maximum system length for satisfactory performance	123
Exa 12.20	Obtain an expression for the total noise figure for the system	124
Exa 12.21	Calculation of second order dispersion coefficient for L1 and dispersion slope for L2	125
Exa 12.22	Determination of the separation for the soliton pulses to avoid interaction and the transmission bit rate . . .	126
Exa 12.23	Determination of the maximum transmission bit rate for the system	127
Exa 13.1	Estimation of the maximum temperature change that could be allowed for the local oscillator laser	129
Exa 13.2	Determination of the operating bandwidth of the receiver	130
Exa 13.3	Calculation of the number of received photons per bit for different detection schemes	131
Exa 13.4	Calculation of the minimum incoming power level	132
Exa 13.5	Calculation of the absolute maximum repeater spacing for different ideal receiver types	133
Exa 13.6	Estimation of the minimum transmitter power requirement for an optical coherent WDM	135
Exa 14.1	Determination of the attenuation for the fiber and estimation of accuracy of the result	137
Exa 14.2	Determination of the absorption loss for the fiber under test	138
Exa 14.3	Determination of the loss due to scattering for the fiber	139
Exa 14.4	Calculation of 3 dB Pulse Broadening and Fiber Bandwidth Length product	140
Exa 14.5	Calculation of the Numerical Aperture of the fiber	140
Exa 14.6	Determination of the outer diameter of the optical fiber in micrometer	141
Exa 14.7	Conversion of optical signal powers to dBm and dBu	142
Exa 14.8	Calculation of the ratio of back scattered optical power to the forward optical power	143

List of Figures

- 12.1 Formation of comparision showing total channel loss against
number of nodes for Bus and Star Distribution Systems . . . 121

Chapter 2

OPTICAL FIBER WAVEGUIDES

Scilab code Exa 2.1 Determination of Critical Angle NA and Acceptance Angle

```
1 //Example 2.1
2 //Program to determine the following:
3 // (a) Critical angle at the core-cladding interface
4 // (b) NA for the fiber
5 // (c) Acceptance angle in air for the fiber
6
7 clear all;
8 clc ;
9 close ;
10
11 //Given data
12 n1=1.50;           //CORE REFRACTIVE INDEX
13 n2=1.47;           //CLADDING REFRACTIVE INDEX
14
15 // (a) Critical angle at the core-cladding interface
16 //      in degrees
16 PHIc=asin(n2/n1)*180/%pi;
17
```

```

18 // (b) NA for the fiber
19 NA=sqrt(n1*n1-n2*n2);
20
21 // (c) Acceptance angle in air for the fiber in
22 degrees
22 THEETAa=asin(NA)*180/%pi;
23
24 // Displaying The Results in Command Window
25 printf("\n\n\t Critical angle at the core-cladding
26 interface is %0.1f degrees.",PHIc);
26 printf("\n\n\t NA for the fiber is %0.2f.",NA);
27 printf("\n\n\t Acceptance angle in air for the fiber
28 is %0.1f degrees.",THEETAa);

```

Scilab code Exa 2.2 Determination of NA Solid Acceptance Angle and the Critical Angle

```

1 //Example 2.2
2 //Program to calculate
3 // (a) NA
4 // (b) Solid Acceptance Angle
5 // (c) Critical Angle at the core-cladding interface
6
7 clear all;
8 clc ;
9 close ;
10
11 // Given data
12 n1=1.46; //CORE REFRACTIVE INDEX
13 delta=0.01; //RELATIVE REFRACTIVE INDEX
14 DIFFERENCE
15 // Numerical Aperture
16 NA=n1*sqrt(2*delta);
17

```

```

18 // Solid Acceptance Angle in radians
19 zeta=%pi*(NA)^2;
20
21 // Critical Angle at the core-cladding interface in
   degrees
22 n2=n1*(1-delta);
23 PHI_c=asin(n2/n1)*180/%pi;
24
25 // Displaying the Results in Command Window
26 printf("\n\n\t The Numerical Aperture for the fiber
      is %0.2f.",NA);
27 printf("\n\n\t The Solid Acceptance Angle for the
      fiber is %0.2f radians.",zeta);
28 printf("\n\n\t The Critical Angle at the core-
      cladding interface for the fiber is %0.1f degrees
      .",PHI_c);

```

Scilab code Exa 2.3 Comparision of Acceptance Angle for Meridional Rays and Skew Rays

```

1 //Example 2.3
2 //Program to Compare the acceptance angle for
   meridional rays and
3 //skew rays which change direction by 100 degrees at
   each reflection
4
5 clear all;
6 clc ;
7 close ;
8
9 //Given data
10 NA=0.4;           //NUMERICAL APERTURE
11 GAMMA=100/2;       //degrees - SKEW RAYS CHANGE
   DIRECTION BY 100 degrees
12

```

```

13 // Acceptance angle for Meridional rays in degrees
14 THEETA_a=asin(NA)*180/%pi;
15
16 // Acceptance angle for Skew rays in degrees
17 THEETA_as=asin(NA/cos(GAMMA*%pi/180))*180/%pi;
18
19 // Displaying the Results in Command Window
20 printf("\n\n\t Acceptance angle for Meridional rays
      is %0.1f degrees.",THEETA_a);
21 printf("\n\n\t Acceptance angle for Skew rays is %0
      .1f degrees.",THEETA_as);
22 printf("\n\n\t Acceptance angle for Skew rays is
      about %1.0f degrees greater than Meridional rays.
      ",THEETA_as-THEETA_a);

```

Scilab code Exa 2.4 Estimation of Normalized Frequency and Number of Guided Modes

```

1 //Example 2.4
2 //Program to estimate
3 // (a) Normalized frequency for the fiber
4 // (b) The Number of guided modes
5
6 clear all;
7 clc ;
8 close ;
9
10 // Given data
11 n1=1.48;           //CORE REFRACTIVE INDEX
12 delta=0.015;       //RELATIVE REFRACTIVE INDEX
                     DIFFERENCE
13 d=80*10^(-6);     //metre - CORE DIAMETER
14 lambda=0.85*10^(-6); //metre - OPERATING
                     WAVELENGTH
15 a=d/2;             //CORE RADIUS

```

```

16
17 // (a) Normalized frequency for the fiber
18 V=2*pi/lambda*a*n1*sqrt(2*delta);
19
20 // (b) The Number of guided modes
21 Ms=(V^2)/2;
22
23 // Displaying the Results in Command Window
24 printf("\n\n\t The Normalized frequency for the
25         fiber is %0.1f.",V);
26 printf("\n\n\t The Number of guided modes of the
27         fiber is %d.",ceil(Ms));

```

Scilab code Exa 2.5 Estimation of total number of Guided Modes propagating in the fiber

```

1 //Example 2.5
2 //Program to estimate total number of guided modes
   propagating in the fiber
3
4 clear all;
5 clc ;
6 close ;
7
8 //Given data
9 NA=0.2;                      //NUMERICAL APERTURE
10 d=50*10^(-6);                //metre - CORE DIAMETER
11 lambda=1*10^(-6);            //metre - OPERATING
   WAVELENGTH
12 a=d/2;                       //CORE RADIUS
13
14 //Normalized Frequency for the fiber
15 V=2*pi/lambda*a*NA;
16
17 //Mode Volume for parabolic profile

```

```

18 M=(V^2)/4;
19
20 //Displaying the Results in Command Window
21 printf("\n\n\t The number of modes supported by
           fiber is %1.0f." ,M);

```

Scilab code Exa 2.6 Estimation of maximum and new core diameter for given relative refractive index differences

```

1 //Example 2.6
2 //Program to estimate
3 // (a) The maximum core diameter of an optical fiber
   for Example 2.4
4 // (b) The new core diameter for single mode
   operation when the
5 //relative refractive index difference is reduced by
   a factor of 10
6
7 clear all;
8 clc ;
9 close ;
10
11 //Given data
12 V=2.4;                      //Normalized Frequency
13 lambda=0.85*10^(-6);        //metre – OPERATING
   WAVELENGTH
14 n1=1.48;                     //CORE REFRACTIVE INDEX
15 delta=0.015;                 //RELATIVE REFRACTIVE INDEX
   DIFFERENCE
16
17 // (a) The maximum core radius of the optical fiber
   with delta=1.5%
18 a1=V*lambda/(2*pi*n1*sqrt(2*delta));
19
20 // (b) The new core radius for single mode operation

```

```

        when the
21 // relative refractive index difference is reduced by
       a factor of 10
22 delta=delta/10;
23 a2=V*lambda/(2*pi*n1*sqrt(2*delta));
24
25 // Displaying the Results in Command Window
26 printf("\n\n\t The maximum core diameter of the
          optical fiber with delta 1.5 percent is %0.1f
          micrometre.",2*a1*10^6);
27 printf("\n\n\t The new core diameter for single mode
          operation when the relative refractive index
          difference is reduced by a factor of 10 is %0.1f
          micrometre.",2*a2*10^6);

```

Scilab code Exa 2.7 Estimation of maximum core diameter of an optical fiber which allows single mode operation

```

1 //Example 2.7
2 //Program to estimate the maximum core diameter of
   an optical fiber
3 //which allows single mode operation
4
5 clear all;
6 clc ;
7 close ;
8
9 // Given data
10 alpha=2;           // Parabolic Profile
11 lambda=1.3*10^(-6); // metre - OPERATING
                      // WAVELENGTH
12 n1=1.5;           // CORE REFRACTIVE INDEX
13 delta=0.01;        // RELATIVE REFRACTIVE INDEX
                      // DIFFERENCE
14

```

```

15 // Normalized Frequency for single mode operation
16 V=2.4*sqrt(1+2/alpha);
17
18 //The maximum core radius for single mode operation
19 a=V*lambda/(2*pi*n1*sqrt(2*delta));
20
21 //Displaying the Results in Command Window
22 printf("\n\n\t The maximum core diameter of the
          optical fiber which allows single mode operation
          is %0.1f micrometre.",2*a*10^6);

```

Scilab code Exa 2.8 Estimation of cutoff wavelength for a step index fiber to exhibit single mode operation

```

1 //Example 2.8
2 //Program to estimate cutoff wavelength for a step
   index fiber to
3 //exhibit single mode operation
4
5 clear all;
6 clc ;
7 close ;
8
9 //Given data
10 a=4.5*10^(-6);           //metre – CORE RADIUS
11 n1=1.46;                 //CORE REFRACTIVE INDEX
12 delta=0.0025;            //RELATIVE REFRACTIVE INDEX
                           DIFFERENCE
13
14 // The cutoff wavelength for a step index fiber
15 lambda_c=2*pi*a*n1*sqrt(2*delta)/2.405;
16
17 //Displaying The Results in Command Window
18 printf("\n\n\t The cutoff wavelength for a step
          index fiber to exhibit single mode operation is

```

```
%1.0 f nm." ,lambda_c*10^9);
```

Scilab code Exa 2.9 Deduction of an approximation for the normalized propagation constant

```
1 //Example 2.9
2 //Note: MAXIMA SCILAB TOOLBOX REQUIRED FOR THIS
   PROGRAM
3 //Program to deduce an approximation for the
   normalized propagation
4 //constant
5
6 clear all;
7 clc ;
8 close ;
9
10 syms W b V;
11
12 //Given data
13 //Eigen Value of the single mode step index fiber
   cladding
14 W =1.1428*V-0.9960;
15
16 //Normalized propagation constant b(V)
17 b= W^2/V^2;
18
19 //Display the result in command window
20 disp (b,"The normalized propagation constant b(V) is
   given by");
```

Scilab code Exa 2.10 Estimation of fiber core diameter for a single mode step index fiber

```

1 //Example 2.10
2 //Program to estimate the fiber core diameter for a
   single mode
3 //step index fiber
4
5 clear all;
6 clc ;
7 close ;
8
9 //Given data
10 V=2.2;                      //NORMALIZED FREQUENCY
11 MFD=11.6*10^(-6);           //metre – MODE FIELD
   DIAMETER
12 W0=5.8*10^(-6);
13
14 // The fiber core radius
15 a=W0/(0.65+1.619*V^(-1.5)+2.879*V^(-6));
16
17 //Displaying the Result in Command Window
18 printf("\n\n\t The fiber core diameter for a single
   mode step index fiber is %0.1f um.",2*a*10^6);

```

Scilab code Exa 2.11 Determination of spot size at the operating wavelength using ESI technique

```

1 //Example 2.11
2 //Program to determine spot size at the operating
   wavelength using ESI
3 //technique
4
5 clear all;
6 clc ;
7 close ;
8
9 //Given data

```

```

10 lambda=1.30*10^(-6); // metre – OPERATING
    WAVELENGTH
11 lambda_c=1.08*10^(-6); // metre – CUTOFF
    WAVELENGTH
12 THEETA_min=12; // degree
13
14 // The effective core radius
15 a_eff=3.832*lambda/(2*%pi*sin(THEETA_min*%pi/180));
16
17 // The effective normalized frequency
18 V_eff=2.405*lambda_c/lambda;
19
20 // The spot size
21 w0=3.81*10^(-6)*(0.6043+1.755*V_eff^(-1.5)+2.78*
    V_eff^(-6));
22
23 // Displaying the Results in Command Window
24 printf("\n\n\t The effective core radius is %0.2f um
    .",a_eff*10^6);
25 printf("\n\n\t The effective normalized frequency is
    %0.2f.",V_eff);
26 printf("\n\n\t The spot size at the operating
    wavelength is %0.2f um.",w0*10^6);

```

Scilab code Exa 2.12 Determination of relative refractive index difference using ESI technique

```

1 //Example 2.12
2 //Program to determine relative refractive index
    difference using ESI
3 //technique
4
5 clear all;
6 clc ;
7 close ;

```

```

8
9 // Given data
10 lambda_c=1.19*10^(-6);           // metre – CUTOFF
11 WAVELENGTH
11 w0=5.2*10^(-6);                 // metre – SPOT SIZE
12 n1=1.485;                      //MAXIMUM REFRACTIVE
12 INDEX OF THE CORE
13
14 // The ESI core diameter
15 d_ESI=1.820*w0;
16
17 // The ESI relative index difference
18 delta_ESI=(0.293/n1^2)*(lambda_c/d_ESI)^2;
19
20 // Displaying the Result in Command Window
21 printf("\n\n\t The relative refractive index
21 difference using ESI technique is %0.2f percent."
21 ,delta_ESI*10^2);

```

Chapter 3

TRANSMISSION CHARACTERISTICS OF OPTICAL FIBERS

Scilab code Exa 3.1 Determination of signal attenuation under different cases and numerical input by output power ratio

```
1 //Example 3.1
2 //Program to Determine
3 // (a) Overall signal attenuation
4 // (b) Signal attenuation per kilometer
5 // (c) Overall signal attenuation for 10 km optical
     link with splices
6 // (d) Numerical Input/Output power ratio
7
8 clear all;
9 clc ;
10 close ;
11
12 // Given data
13 Pi=120;           //uW – INPUT OPTICAL POWER
14 Po=3;            //uW – OUTPUT OPTICAL POWER
15 L=8;             //km – FIBER LENGTH
```

```

16
17 // (a) Overall signal attenuation
18 Alpha_dB_L=10*log10(Pi/Po);
19
20 // (b) Signal attenuation per kilometer
21 Alpha_dB=Alpha_dB_L/L;
22
23 // (c) Overall signal attenuation for 10 km optical
24 link with splices
25 A=Alpha_dB*10+9;
26
27 // (d) Numerical Input/Output power ratio
28 Pi_by_Po=10^(round(A)/10);
29
30 // Displaying the Results in Command Window
31 printf("\n\n\t (a) Overall signal attenuation is %1.0
32 f dB.",Alpha_dB_L);
33 printf("\n\n\t (b) Signal attenuation per kilometer
34 is %1.0 f dB/km.",Alpha_dB);
35 printf("\n\n\t (c) Overall signal attenuation for 10
36 km optical link with splices is %1.0 f dB.",A);
37 printf("\n\n\t (d) Numerical Input/Output power ratio
38 is %0.1 f.",Pi_by_Po);

```

Scilab code Exa 3.2 Determination of theoretical attenuation per kilometer due to fundamental Rayleigh scattering

```

1 //Example 3.2
2 //Program to Determine Theoretical attenuation in dB
3 // /km due to fundamental rayleigh scattering at
4 //optical wavelengths:
5 // (a) 0.63um
6 // (b) 1.00um
7 // (c) 1.30um
8

```

```

7 clear all;
8 clc ;
9 close ;
10
11 // Given data
12 n=1.46;                                //REFRACTIVE INDEX
13 p=0.286;                                //PHOTOELASTIC COEFFICIENT
14 Bc=7*10^(-11);                          //m^2/N - ISOTHERMAL
15                                     COMPRESSIBILITY
16 K=1.381*10^(-23);                      // J/K - BOLTZMANN's CONSTANT
17 Tf=1400;                                 // Kelvin - FICTIVE TEMPERATURE
18 l=1000;                                  // metre - FIBER LENGTH
19
20 // (a) Attenuation in dB/km due to fundamental
21      rayleigh scattering at 0.63um
22 lambda=0.63*10^(-6);                  // metre -
23                                     WAVELENGTH
24 Gamma_R=8*(%pi)^3*n^8*p^2*Bc*K*Tf/(3*lambda^4);
25 L_km1=exp(-Gamma_R*l)
26 A1=10*log10(1/L_km1);
27
28 // (b) Attenuation in dB/km due to fundamental
29      rayleigh scattering at 1.00um
30 lambda=1.00*10^(-6);                  // metre -
31                                     WAVELENGTH
32 Gamma_R=8*(%pi)^3*n^8*p^2*Bc*K*Tf/(3*lambda^4);
33 L_km2=exp(-Gamma_R*l)
34 A2=10*log10(1/L_km2);
35
36 // (c) Attenuation in dB/km due to fundamental
37      rayleigh scattering at 1.30um
38 lambda=1.30*10^(-6);                  // metre -
39                                     WAVELENGTH
40 Gamma_R=8*(%pi)^3*n^8*p^2*Bc*K*Tf/(3*lambda^4);
41 L_km3=exp(-Gamma_R*l)
42 A3=10*log10(1/L_km3);
43
44 // Displaying the Results in Command Window

```

```

38 printf("\n\n\t (a) Attenuation in dB/km due to
           fundamental rayleigh scattering at 0.63um = %0.1f
           dB/km." ,A1);
39 printf("\n\n\t (b) Attenuation in dB/km due to
           fundamental rayleigh scattering at 1.00um = %0.1f
           dB/km." ,A2);
40 printf("\n\n\t (c) Attenuation in dB/km due to
           fundamental rayleigh scattering at 1.30um = %0.1f
           dB/km." ,A3);

```

Scilab code Exa 3.3 Comparision of threshold optical powers for SBS and SRS

```

1 //Example 3.3
2 //Program to compare the threshold optical powers
   for stimulated
3 //Brillouin and Raman Scattering
4
5 clear all;
6 clc ;
7 close ;
8
9 //Given data
10 alpha_dB=0.5;          //dB/km – ATTENUATION
11 lambda=1.3;            //micrometre – OPERATING
   WAVELENGTH
12 d=6;                   //micrometre – FIBER CORE
   DIAMETER
13 nu=0.6;                //GHz – LASER SOURCE
   BANDWIDTH
14
15 //Threshold optical power for SBS
16 Pb=4.4*10^(-3)*(d^2)*(lambda^2)*alpha_dB*nu;
17
18 //Threshold optical power for SRS

```

```

19 Pr=5.9*10^(-2)*d^2*lambda*alpha_dB;
20
21 // Displaying the Results in Command Window
22 printf("\n\n\t The threshold optical power for SBS
23      is %0.1f mW.",Pb*10^3);
24 printf("\n\n\t The threshold optical power for SRS
25      is %0.2f W.",Pr);

```

Scilab code Exa 3.4 Estimation of critical radius of curvature

```

1 //Example 3.4
2 //Program to estimate critical radius of curvature
3 //at which large
4 //bending loss occur
5 clear all;
6 clc ;
7 close ;
8
9 //Given data for part (a)
10 n1=1.500;           //metre - LENGTH
11 delta=0.03;         /*100 percent - RELATIVE
12                         REFRACTIVE INDEX DIFFERENCE
13 lambda=0.82*10^(-6); //metre - OPERATING WAVELENGTH
14
15 //Calculation of the radius of curvature of Multi
16 //Mode fiber
17 n2=sqrt(n1^2-2*delta*n1^2);
18 Rc=3*n1^2*lambda/(4*pi*(n1^2-n2^2)^(3/2));
19
20 //Given data for part (b)
21 n1=1.500;           //metre - LENGTH
22 delta=0.003;         /*100 percent - RELATIVE
23                         REFRACTIVE INDEX DIFFERENCE
24 lambda=1.55*10^(-6); //metre - OPERATING WAVELENGTH

```

```

22 d=8*10^(-6);           //metre – CORE DIAMETER
23
24 //Calculation of the radius of curvature of Single
   Mode fiber
25 n2=sqrt(n1^2-2*delta*n1^2);
26 a=d/2;
27 lambda_c=2*pi*a*n1*sqrt(2*delta)/2.405;
28 Rcs=20*lambda*(2.748-0.996*lambda/lambda_c)^(-3)/(n1
   -n2)^(3/2);
29
30 //Displaying the Results in Command Window
31 printf("\n\n\t(a)The radius of curvature of Multi
   Mode fiber is %1.0f um.",Rc/10^(-6));
32 printf("\n\n\t(b)The radius of curvature of Single
   Mode fiber is %1.0f mm.",Rcs/10^(-3));

```

Scilab code Exa 3.5 Estimation of Maximum Bandwidth Pulse dispersion per unit length and BW Length product

```

1 //Example 3.5
2 //Program to estimate
3 // (a)The maximum possible bandwidth on the link
   assuming no ISI
4 // (b)The pulse dispersion per unit length
5 // (c)The bandwidth-length product for the fiber
6
7 clear all;
8 clc ;
9 close ;
10
11 //Given data
12 tau=0.1*10^(-6); //second – TOTAL PULSE BROADENING
13 L=15;             //km – DISTANCE
14
15 // (a)The maximum possible bandwidth on the link

```

```

        assuming no ISI
16 B_opt=1/(2*tau);
17
18 // (b) The pulse dispersion per unit length
19 Dispersion=tau/L;
20
21 // (c) The bandwidth-length product for the fiber
22 B_optXL=B_opt*L;
23
24 // Displaying the Results in Command Window
25 printf("\n\n\t (a)The maximum possible bandwidth on
the link assuming no ISI is %1.0f MHz.",B_opt
/10^6);
26 printf("\n\n\t (b)The pulse dispersion per unit
length is %0.2f ns/km.",Dispersion/10^(-9));
27 printf("\n\n\t (c)The bandwidth-length product for
the fiber is %1.0f MHz km.",B_optXL/10^6);

```

Scilab code Exa 3.6 Determination of Material Dispersion Parameter and RMS Pulse Broadening

```

1 //Example 3.6
2 //Program to estimate Material dispersion parameter
and rms pulse
3 //broadening per kilometer
4 clear all;
5 clc ;
6 close ;
7
8 //Given data
9 lambda=0.85*10^(-6);      //metre - WAVELENGTH
10 L=1;                      //km - DISTANCE
11 MD=0.025; //MATERIAL DISPERSION = mod(lamda ^ 2*[ del ^ 2(
    n1 ) / del(lamda) ^ 2)
12 c=2.998*10^8;             //m/s - VELOCITY OF LIGHT IN

```

```

VACCUM
13 sigma_lambda=20*10^(-9); //metre – RMS SPECTRAL WIDTH
14
15 //Material Dispersion Parameter
16 M=MD/(lambda*c);
17
18 //R.M.S. pulse broadening per kilometer
19 sigma_m=sigma_lambda*L*M;
20
21 //Displaying the Results in Command Window
22 printf("\n\n\t Material Dispersion Parameter is %0.1
f ps/nm/km.",M*10^6);
23 printf("\n\n\t R.M.S. pulse broadening per kilometer
is %0.2 f ns/km.",sigma_m/10^(-12));

```

Scilab code Exa 3.7 Estimation of RMS Pulse Broadening per kilometer for the fiber

```

1 //Example 3.7
2 //Program to estimate rms pulse broadening per
   kilometer for the fiber
3
4 clear all;
5 clc ;
6 close ;
7
8 //Given data
9 lambda=0.85*10^(-6);      //metre – WAVELENGTH
10 L=1;                      //km – DISTANCE
11 MD=0.025; //MATERIAL DISPERSION = mod(lamda ^2*[ del ^2(
   n1)/del(lamda) ^2)
12 c=2.998*10^8;             //m/s – VELOCITY OF LIGHT IN
   VACCUM
13 sigma_lambda_by_lambda=0.0012; // sigma_lambda/lambda
14

```

```

15 // Material Dispersion Parameter
16 M=MD/(lambda*c);
17
18 //R.M.S. Spectral Width
19 sigma_lambda=sigma_lambda_by_lambda*lambda;
20
21 //R.M.S. pulse broadening per kilometer
22 sigma_m=sigma_lambda*L*M;
23
24 //Displaying the Result in Command Window
25 printf("\n\n\t R.M.S. pulse broadening per kilometer
is %0.2f ns/km.",sigma_m/10^(-12));

```

Scilab code Exa 3.8 Estimation of Delay Difference RMS Pulse Broadening Maximum Bit Rate and BW Length product

```

1 //Example 3.8
2 //Program to estimate
3 // (a)The delay difference between the slowest and
   fastest modes at the fiber output
4 // (b)The rms pulse broadening due to intermodal
   dispersion on the link
5 // (c)The maximum bit rate
6 // (d)Bandwidth-length product corresponding to (c)
7
8 clear all;
9 clc ;
10 close ;
11
12 //Given data
13 delta=0.01;      /*100 percent - RELATIVE
   REFRACTIVE INDEX DIFFERENCE
14 L=6;            //km - LENGTH OF OPTICAL LINK
15 n1=1.5;          //CORE REFRACTIVE INDEX
16 c=2.998*10^8;    //m/s - VELOCITY OF LIGHT IN VACCUM

```

```

17
18 // (a)The delay difference between the slowest and
   fastest modes at the fiber output
19 del_Ts=L*n1*delta/c;
20
21 // (b)The rms pulse broadening due to intermodal
   dispersion on the link
22 sigma_s=L*n1*delta/(2*sqrt(3)*c);
23
24 // (c)The maximum bit rate
25 Bt=1/(2*del_Ts);
26 //Improved maximum bit rate
27 Bti=0.2/sigma_s;
28
29 // (d)Bandwidth-length product corresponding to (c)
30 BoptXL=Bti*L;
31
32 // Displaying the Results in Command Window
33 printf("\n\n\t (a)The delay difference between the
   slowest and fastest modes at the fiber output is
   %1.0f ns.",del_Ts/10^(-12));
34 printf("\n\n\t (b)The rms pulse broadening due to
   intermodal dispersion on the link is %0.1f ns.,
   sigma_s/10^(-12));
35 printf("\n\n\t (c)The maximum bit rate is %0.1f Mbit
   /s and improved bit rate is %0.1f Mbit/s.",Bt
   /10^(9),Bti/10^(9));
36 printf("\n\n\t (d)Bandwidth-length product is %0.1f
   MHz km.",BoptXL/10^(9));

```

Scilab code Exa 3.9 Comparision of RMS Pulse Broadening per Kilometer for two cases

```

1 //Example 3.9
2 //Program to compare rms pulse broadening per

```

```

    kilometer due to
3 //intermodal dispersion for multimode step index
   fiber with that of
4 //near parabolic graded index fiber
5
6 clear all;
7 clc ;
8 close ;
9
10 //Given data
11 delta=0.01;      /*100 percent - RELATIVE
   REFRACTIVE INDEX DIFFERENCE
12 L=1;              //km - LENGTH OF OPTICAL LINK
13 n1=1.5;            //CORE REFRACTIVE INDEX
14 c=2.998*10^8;     //m/s - VELOCITY OF LIGHT IN VACCUM
15
16 //RMS pulse broadening /km due to intermodal
   dispersion for MMSI Fiber
17 sigma_s=L*n1*delta/(2*sqrt(3)*c);
18
19 //RMS pulse broadening /km for near parabolic graded
   index fiber
20 sigma_g=L*n1*delta^2/(20*sqrt(3)*c);
21
22 //Displaying the Results in Command Window
23 printf("\n\n\t RMS pulse broadening per kilometer
   due to intermodal dispersion for MMSI Fiber is %0
   .1f ns/km.",sigma_s/10^(-12));
24 printf("\n\n\t RMS pulse broadening per kilometer
   for near parabolic graded index fiber is %0.1f ps
   /km.",sigma_g/10^(-15));

```

Scilab code Exa 3.10 Estimation of total RMS pulse broadening and BW Length product

```

1 //Example 3.10
2 //Program to estimate
3 // (a)RMS pulse broadening per kilometer
4 // (b)Bandwidth-Length product for the fiber
5
6 clear all;
7 clc ;
8 close ;
9
10 //Given data
11 NA=0.3 ;           //NUMERICAL APERTURE
12 n1=1.45;          //CORE REFRACTIVE INDEX
13 M=250*10^(-6);    //s/km^2 – MATERIAL DISPERSION
14 sigma_lambda=50*10^(-9); //metre – RMS SPECTRAL
15 L=1;               //km – LENGTH OF OPTICAL LINK
16 c=2.998*10^8;     //m/s – VELOCITY OF LIGHT IN VACCUM
17
18 //RMS pulse broadening /km due to material
19 dispersion
20 sigma_m=sigma_lambda*L*M;
21
22 //RMS pulse broadening /km due to intermodal
23 dispersion
24 sigma_s=L*NA^2/(4*sqrt(3)*n1*c);
25
26 // (a)Total RMS pulse broadening /km
27 sigma_t=sqrt(sigma_m^2+sigma_s^2);
28
29 // (b)Bandwidth-Length product
30 BoptXL=0.2/sigma_t;
31
32 // Displaying the Results in Command Window
33 printf("\n\n\t Total RMS pulse broadening per
34 kilometer is %0.1f ns/km.",sigma_t/10^(-12));
35 printf("\n\n\t Bandwidth-Length product is %0.1f MHz
36 km.",BoptXL/10^(9));

```

Scilab code Exa 3.11 Comparision of total first order dispersion for the fiber

```
1 //Example 3.11
2 //Program to compare the total first order
   dispersion and determine
3 //waveguide dispersion
4
5 clear all;
6 clc ;
7 close ;
8
9 //Given data
10 lambda0=1310;           //nm – ZERO DISPERSION
   WAVELENGTH
11 So=0.09*10^(-12);      // s/nm^2/km – DISPERSION
   SLOPE
12
13 //Dt at 1280nm
14 lambda1=1280;           //nm – OPERATING WAVELENGTH
15 Dt1=lambda1*So/4*(1-(lambda0/lambda1)^4);
16
17 //Dt at 1550nm
18 lambda2=1550;           //nm – OPERATING WAVELENGTH
19 Dt2=lambda2*So/4*(1-(lambda0/lambda2)^4);
20
21 //Waveguide Dispersion at 1550nm
22 Dm=13.5*10^(-12);      //s/nm/km – MATERIAL
   DISPERSION
23 Dp=0.4*10^(-12);        //s/nm/km – PROFILE
   DISPERSION
24 Dw=Dt2-(Dm+Dp);
25
26 //Displaying the Results in Command Window
```

```

27 printf("\n\n\t Dt(1280nm) = %0.1f ps/nm/km.\n",Dt1
28 /10^(-12));
29 printf("\n\n\t Dt(1550nm) = %0.1f ps/nm/km.\n",Dt2
29 /10^(-12));
29 printf("\n\n\t Dw = %0.1f ps/nm/km.\n",Dw/10^(-12));

```

Scilab code Exa 3.12 Determination of Modal birefringence coherence length and difference between propagation constants

```

1 //Example 3.12
2 //Program to determine modal birefringence ,
3 // coherence length and difference between
4 // propagation constants for the two orthogonal
5 // modes
6
7
8 //Given data
9 lambda=0.9*10^(-6); //metre - PEAK WAVELENGTH
10 Lb=9*10^(-2); //metre - BEAT LENGTH
11 del_lambda=1*10^(-9); //metre - SPECTRAL LINE WIDTH
12
13 //Modal Birefringence
14 Bf=lambda/Lb;
15
16 //Coherence Length
17 Lbc=lambda^2/(Bf*del_lambda);
18
19 //Difference between propagation constants for the
20 //two orthogonal
21 //modes
22 Bx_minus_By=2*pi/Lb;

```

```

23 // Displaying the Results in Command Window
24 printf("\n\n\t The Modal birefringence is %1.0f X
25      10^(-5) .",Bf/10^(-5));
26 printf("\n\n\t The Coherence Length is %d m.",round(
27      Lbc));
28 printf("\n\n\t The difference between propagation
29      constants for the two orthogonal modes is %0.1f .
30      ",Bx_minus_By);

```

Scilab code Exa 3.13 Determination of fiber birefringence for two given cases

```

1 //Example 3.13
2 //Program to determine fiber birefringence for given
3 //beat lengths
4 // (1)Lb = 0.7 mm
5 // (2)Lb = 80 m
6
7 clear all;
8 clc ;
9 close ;
10
11 //Given data
12 lambda=1.3*10^(-6); //metre – OPERATING WAVELENGTH
13
14 //Part (1)
15 Lb1=0.7*10^(-3); //metre – BEAT LENGTH
16 Bf1=lambda/Lb1;
17
18 //Part (2)
19 Lb2=80; //metre – BEAT LENGTH
20 Bf2=lambda/Lb2;
21
22 //Displaying the Results in Command Window
23 printf("\n\n\t The fiber birefringence for Lb = 0.7

```

```
    mm is %0.2f X 10^(-3) which is high .",Bf1/10^(-3)) ;
23 printf("\n\n\t The fiber birefringence for Lb = 80 m
      is %0.2f X 10^(-8) which is low .",Bf2/10^(-8));
```

Scilab code Exa 3.14 Determination of mode coupling parameter for the fiber

```
1 //Example 3.14
2 //Program to determine the mode coupling parameter
   for the fiber
3
4 clear all;
5 clc ;
6 close ;
7
8 //Given data
9 L=3.5*10^3;           //metre - LENGTH
10 CT=-27;              //dB - POLARIZATION CROSSTALK
11
12 //Mode coupling parameter for the fiber
13 h=(10^(CT/10))/L; //as tan(h*L)=h*L for small values
14
15 //Displaying the Result in Command Window
16 printf("\n\n\t The mode coupling parameter for the
      fiber is %0.1f X 10^(-7)/m.",h/10^(-7));
```

Chapter 4

OPTICAL FIBERS AND CABLES

Scilab code Exa 4.1 Estimation of fracture stress for the fiber and percentage strain at the break

```
1 //Example 4.1
2 //Program to determine the following:
3 // (a) Fracture Stress in psi for the fiber
4 // (b) Percentage Strain at the break
5
6 clear all;
7 clc ;
8 close ;
9
10 //Given data
11 St=2.6*10^6;           // psi      - THEORETICAL
12 la=0.16*10^-9;         // metres   - BOND DISTANCE
13 C=10*10^-9;            // metres   - DEPTH OF CRACK
14 E= 9*10^10 ;           // N/m^2    - YOUNG'S MODULUS OF
15                                SILICA
16 Gamma_p=(4*la*St^2)/E;
```

```
17
18 //Fracture Stress for an Elliptical Crack
19 Sf_psi=sqrt((2*E*Gamma_p)/(%pi*C));
20
21 //Fracture Stress in psi units
22 Sf=Sf_psi*6894.76;
23
24 //Strain Calculation
25 strain=Sf/E;
26
27 //Displaying the Results in Command Window
28 printf("\n\n\t Fracture Stress for the fiber is %0.2
      f X 10^9 N/m or %0.2f X 10^5 psi.",Sf/10^9,Sf_psi
      /10^5);
29 printf("\n\n\t Percentage Strain at the break is %d
      percent.",strain*100);
```

Chapter 5

OPTICAL FIBER CONNECTIONS JOINTS COUPLERS AND ISOLATORS

Scilab code Exa 5.1 Calculation of the optical loss in decibels at the joint

```
1 //Example 5.1
2 //Program to calculate the optical loss in decibels
   at the joint
3
4 clear all;
5 clc ;
6 close ;
7
8 //Given data
9 n1=1.5;           //CORE REFRACTIVE INDEX
10 n=1.0;
11
12 //Magnitude of Fresnel reflection at the fiber-air
   interface
13 r=((n1-n)/(n1+n))^2;
```

```

14
15 //Optical Loss
16 Loss_fres=-10*log10(1-r);
17
18 //Displaying the Results in Command Window
19 printf("\n\n\t Optical Loss is %0.2f dB .",Loss_fres
   );
20 printf("\n\n\t Total loss due to Fresnel Reflection
   at the fiber joint is %0.2f dB .",Loss_fres*2);

```

Scilab code Exa 5.2 Estimation of the insertion loss in two given cases

```

1 //Example 5.2
2 //Program to estimate the insertion loss when:
3 // (a) there is a small air gap at the joint
4 // (b) the joint is considered index matched
5
6 clear all;
7 clc ;
8 close ;
9
10 //Given data
11 n1=1.5;           //CORE REFRACTIVE INDEX
12 n=1.0;
13 y=5*10^(-6);     //metre – LATERAL MISALIGNMENT
14 a=25*10^(-6);    //metre – CORE RADIUS
15
16 // (a) Coupling efficiency
17 eeta_lat1=16*(n1/n)^2/(1+(n1/n))^4*1/%pi*(2*cos(y
   /(2*a))-(y/a)*sqrt(1-(y/(2*a))^2));
18 //Insertion Loss
19 Loss_lat1=-10*log10(eeta_lat1);
20
21 // (b) Coupling efficiency
22 eeta_lat2=1/%pi*(2*cos(y/(2*a))-(y/a)*sqrt(1-(y/(2*a))^2));

```

```

        a))^2));
23 //Insertion Loss
24 Loss_lat2=-10*log10(eeta_lat2);
25
26 //Displaying the Results in Command Window
27 printf("\n\n\t(a) Insertion Loss (there is a small
         air gap at the joint) is %0.2f dB .",Loss_lat1);
28 printf("\n\n\t(b) Insertion Loss (the joint is
         considered index matched) is %0.2f dB .",
         Loss_lat2);

```

Scilab code Exa 5.3 Estimation of the insertion loss in two given cases

```

1 //Example 5.3
2 //Program to estimate the insertion loss when:
3 // (a) there is uniform illumination of all guided
   modes only
4 // (b) there is uniform illumination of all guided and
   leaky modes
5
6 clear all;
7 clc ;
8 close ;
9
10 // Given data
11 y=3*10^(-6);           //metre - LATERAL MISALIGNMENT
12 a=25*10^(-6);         //metre - CORE RADIUS
13
14 // (a) Misalignment Loss
15 Lt1=0.85*(y/a);
16 // Coupling efficiency
17 eeta_lat1=1-Lt1;
18 // Insertion Loss
19 Loss_lat1=-10*log10(eeta_lat1);
20

```

```

21 // (b) Misalignment Loss
22 Lt2=0.75*(y/a);
23 //Coupling efficiency
24 eeta_lat2=1-Lt2;
25 //Insertion Loss
26 Loss_lat2=-10*log10(eeta_lat2);
27
28 // Displaying the Results in Command Window
29 printf("\n\n\t(a) Insertion Loss (there is uniform
         illumination of all guided modes only) is %0.2f
         dB .",Loss_lat1);
30 printf("\n\n\t(b) Insertion Loss (there is uniform
         illumination of all guided and leaky modes) is %0
         .2f dB .",Loss_lat2);

```

Scilab code Exa 5.4 Estimation of the insertion loss in two given cases

```

1 //Example 5.4
2 //Program to estimate the insertion loss for
3 //NA = 0.2
4 //NA = 0.4
5
6 clear all;
7 clc ;
8 close ;
9
10 //Given data
11 n1=1.48;           //CORE REFRACTIVE INDEX
12 n=1.0;
13 theeta=5;          //degree - ANGULAR MISALIGNMENT
14
15 //Calculation for NA = 0.2
16 NA=0.2
17 eeta_ang1=16*(n1/n)^2/(1+n1/n)^4*(1-n*theeta*pi
   /180/(%pi*NA));

```

```

18 // Insertion Loss
19 Loss_ang1=-10*log10(eeta_ang1);
20
21 // Calculation for NA = 0.4
22 NA=0.4
23 eeta_ang2=16*(n1/n)^2/(1+n1/n)^4*(1-n*theeta*pi
    /180/(%pi*NA));
24 // Insertion Loss
25 Loss_ang2=-10*log10(eeta_ang2);
26
27 // Displaying the Results in Command Window
28 printf("\n\n\t Insertion Loss (NA=0.2) is %0.2f dB .
    ",Loss_ang1);
29 printf("\n\n\t Insertion Loss (NA=0.4) is %0.2f dB .
    ",Loss_ang2);

```

Scilab code Exa 5.5 Estimation of the total insertion loss of the fiber joint with a lateral and angular misalignment

```

1 //Example 5.5
2 //Program to estimate the total insertion loss of
    the fiber joint
3 //with a lateral misalignment and angular
    misalignment
4
5 clear all;
6 clc ;
7 close ;
8
9 //Given data
10 V=2.40;           //NORMALIZED FREQUENCY
11 n1=1.46;          //CORE REFRACTIVE INDEX
12 d=8*10^(-6);     //metre - CORE DIAMETER
13 NA=0.1;           //NUMERICAL APERTURE
14 y=1*10^(-6);      //metre - LATERAL MISALIGNMENT

```

```

15 theeta=1;           // degree – ANGULAR MISALIGNMENT
16
17 //Normalized Spot Size
18 a=d/2;
19 omega=a*(0.65+1.62*V^(-3/2)+2.88*V^(-6))/sqrt(2);
20
21 //Loss due to lateral offset
22 Tl=2.17*(y/omega)^2;
23
24 //Loss due to angular misalignment
25 Ta=2.17*((theeta*pi/180)*omega*n1*V/(a*NA))^2;
26
27 //Total insertion loss
28 Tt=Tl+Ta;
29
30 //Displaying the Result in Command Window
31 printf("\n\n\t Total Insertion Loss is %0.2f dB .",
       Tt);

```

Scilab code Exa 5.6 Calculation of the loss at the connection due to mode field diameter mismatch

```

1 //Example 5.6
2 //Program to calculate the loss at the connection
   due to mode field
3 //diameter mismatch
4
5 clear all;
6 clc ;
7 close ;
8
9 //Given data
10 MFD01=11.2;          //um – MODE FIELD DIAMETER
11 MFD02=8.4;           //um – MODE FIELD DIAMETER
12

```

```

13 // Calculation of Intrinsic Loss
14 omega_01=MFD01/2;
15 omega_02=MFD02/2;
16 Loss_int=-10*log10(4*(omega_02/omega_01+omega_01/
    omega_02)^(-2))
17
18 // Displaying the Result in Command Window
19 printf("\n\n\t Intrinsic Loss is %0.2f dB .",
    Loss_int);

```

Scilab code Exa 5.7 Determination of excess loss insertion losses crosstalk and split ratio

```

1 //Example 5.7
2 //Program to determine the excess loss , insertion
   losses , crosstalk
3 //and split ratio
4
5 clear all;
6 clc ;
7 close ;
8
9 //Given data
10 P1=60*10^(-6);           //Watts - INPUT POWER AT PORT 1
11 P2=0.004*10^(-6);        //Watts - OUTPUT POWER AT PORT 2
12 P3=26*10^(-6);          //Watts - OUTPUT POWER AT PORT 3
13 P4=27.5*10^(-6);         //Watts - OUTPUT POWER AT PORT 4
14
15 // Calculation of Excess Loss
16 Excess_loss=10*log10(P1/(P3+P4));
17
18 // Calculation of Insertion Loss ( ports 1 to 3)
19 Insertion_loss3=10*log10(P1/P3);
20
21 // Calculation of Insertion Loss ( ports 1 to 4)

```

```

22 Insertion_loss4=10*log10(P1/P4);
23
24 //Calculation of Crosstalk
25 Crosstalk=10*log10(P2/P1);
26
27 //Calculation of Split Ratio
28 Split_ratio=P3/(P3+P4)*100;
29
30 //Displaying the Results in Command Window
31 printf("\n\n\t Excess Loss is %0.2f dB .",
   Excess_loss);
32 printf("\n\n\t Intrinsic Loss (ports 1 to 3) is %0.2
   f dB .",Insertion_loss3);
33 printf("\n\n\t Intrinsic Loss (ports 1 to 4) is %0.2
   f dB .",Insertion_loss4);
34 printf("\n\n\t Crosstalk is %0.1f dB .",Crosstalk);
35 printf("\n\n\t Split Ratio is %0.1f percent .",
   Split_ratio);

```

Scilab code Exa 5.8 Determination of excess loss insertion losses crosstalk and split ratio

```

1 //Example 5.8
2 //Program to determine the total loss incurred by
   the star coupler
3 //and average insertion loss
4
5 clear all;
6 clc ;
7 close ;
8
9 //Given data
10 Pi=1*10^(-3);           //Watts - INPUT POWER AT PORT 1
11 Po=14*10^(-6);          //Watts - OUTPUT POWER AT OTHER
   PORTS

```

```

12 N=32;           // Ports
13
14 // Calculation of Splitting Loss
15 Splitting_loss=10*log10(N);
16
17 // Calculation of Excess Loss
18 Excess_loss=10*log10(Pi/(Po*N));
19
20 // Calculation of Total loss
21 Total_loss=Splitting_loss+Excess_loss;
22
23 // Calculation of Average Insertion Loss
24 Insertion_loss=10*log10(Pi/Po);
25
26 // Displaying the Results in Command Window
27 printf("\n\n\t Total loss is %0.2f dB .",Total_loss)
      ;
28 printf("\n\n\t Average Insertion Loss is %0.2f dB ."
      ,Insertion_loss);

```

Scilab code Exa 5.9 Determination of the insertion loss associated with one typical path

```

1 //Example 5.9
2 //Program to determine the insertion loss associated
   with one typical
3 //path
4
5 clear all;
6 clc ;
7 close ;
8
9 //Given data
10 Excess_loss=0.2;    //dB – EXCESS LOSS OF EACH PORT
11 Split_ratio=0.5;    /*100 percent – SPLIT RATIO

```

```

12 N=16;           //PORTS
13 M=4;           //For N=16 ports
14 Splice_loss=0.1; //dB – SPLICE LOSS
15
16 // Calculation of Total Excess Loss
17 Total_Excess_loss=M*Excess_loss+3*Splice_loss;
18
19 // Calculation of Splitting Loss
20 Splitting_loss=10*log10(N);
21
22 // Calculation of Insertion Loss
23 Insertion_loss=Splitting_loss+Total_Excess_loss;
24
25 // Displaying the Result in Command Window
26 printf("\n\n\t Insertion Loss is %0.2f dB .",
       Insertion_loss);

```

Scilab code Exa 5.10 Calculation of the grating period for reflection

```

1 //Example 5.10
2 //Program to find the grating period for reflection
3
4 clear all;
5 clc ;
6 close ;
7
8 //Given data
9 n=1.46;           //CORE REFRACTIVE INDEX
10 lambda_b=1.55; //um – WAVELENGTH
11
12 //Grating Period
13 lambda=lambda_b/(2*n);
14
15 //Displaying the Result in Command Window
16 printf("\n\n\t Grating Period is %0.2f um .",lambda)

```

;

Chapter 6

OPTICAL SOURCES 1 THE LASER

Scilab code Exa 6.1 Calculation of the ratio of stimulated emission rate to the spontaneous emission rate

```
1 //Example 6.1
2 //Program to calculate the ratio of stimulated
   emission rate to the
3 //spontaneous emission rate
4
5 clear all;
6 clc ;
7 close ;
8
9 //Given data
10 Lambda=0.5*10^-6;           // metres – OPERATING
   WAVELENGTH
11 k=1.381*10^(-23);          //m^2 kg/s – BOLTZMANN's
   CONSTANT
12 c= 2.998*10^8;             //m/s – SPEED OF LIGHT
13 h=6.626*10^(-34);          //J/K – PLANK's CONSTANT
14 T=1000;                     //Kelvin – TEMPERATURE
15
```

```

16 // Average operating frequency
17 f=c/Lambda;
18
19 // Stimulated Emission Rate/Spontaneous Emission Rate
20 Ratio=1/(exp(h*f/(k*T))-1);
21
22 // Displaying the Result in Command Window
23 printf("\n\n\t Stimulated Emission Rate/Spontaneous
Emission Rate = %0.1f X 10^(-13).",Ratio
/10^(-13));

```

Scilab code Exa 6.2 Determination of the number of longitudinal modes and their frequency separation in a ruby laser

```

1 // Example 6.2
2 // Program to determine the number of longitudinal
   modes and their
3 // frequency separation in a ruby laser
4
5 clear all;
6 clc ;
7 close ;
8
9 // Given data
10 Lambda=0.55*10^-6;      // metres – PEAK EMISSION
   WAVELENGTH
11 n=1.78;                  // REFRACTIVE INDEX
12 c= 2.998*10^8;          // m/s – SPEED OF LIGHT
13 L=4*10^(-2);            // metres – CRYSTAL LENGTH
14
15 // Number of Longitudinal modes
16 q=2*n*L/Lambda;
17
18 // Frequency separation of the modes
19 del_f=c/(2*n*L);

```

```
20
21 // Displaying the Results in Command Window
22 printf("\n\n\t Number of Longitudinal modes is %0.1f
23 X 10^5.", q/10^5);
24 printf("\n\n\t Frequency separation of the modes is
25 %0.1f GHz.", del_f/10^9);

---


```

Scilab code Exa 6.3 Calculation of laser gain coefficient for the cavity

```
1 //Example 6.3
2 //Program to calculate laser gain coefficient for
3 // the cavity
4
5 clear all;
6 clc ;
7
8 //Given data
9 L=600*10^-4;           //cm - CAVITY LENGTH
10 r=0.3;                 //*100 percent - REFLECTIVITY
11 alpha_bar= 30;          //per cm - LOSSES
12
13 //Laser Gain Coefficient
14 gth_bar=alpha_bar+1/L*log(1/r);
15
16 //Displaying the Result in Command Window
17 printf("\n\n\t Laser Gain Coefficient is %1.0f per
18 cm.", gth_bar);

---


```

Scilab code Exa 6.4 Comparision of the approximate radiative minority carrier lifetimes in GaAs and Si

```
1 //Example 6.4
```

```

2 //Program to compare the approximate radiative
   minority carrier
3 //lifetimes in gallium arsenide and silicon
4
5 clear all;
6 clc ;
7 close ;
8
9 //Given data
10 N=10^18;           //per cm^3 - HOLE
   CONCENTRATION
11 Br1=7.21*10^(-10); //cm^3 / s - RECOMBINATION
   COEFFICIENT FOR GaAs
12 Br2=1.79*10^(-15); //cm^3 / s - RECOMBINATION
   COEFFICIENT FOR Si
13
14 //Radiative minority carrier lifetime for GaAs
15 tau_r1=1/(Br1*N);
16
17 //Radiative minority carrier lifetime for Si
18 tau_r2=1/(Br2*N);
19
20 //Displaying the Results in Command Window
21 printf("\n\n\t Radiative minority carrier lifetime
   for GaAs is %0.2f ns.",tau_r1/10^(-9));
22 printf("\n\n\t Radiative minority carrier lifetime
   for Si is %0.2f ms.",tau_r2/10^(-3));

```

Scilab code Exa 6.5 Determination of the threshold current density and the threshold current for the device

```

1 //Example 6.5
2 //Program to determine the threshold current density
   and the
3 //threshold current for the device

```

```

4
5 clear all;
6 clc ;
7 close ;
8
9 // Given data
10 n=3.6;                                //REFRACTIVE INDEX OF GaAs
11 beeta_bar=21*10^(-3);                  //A/cm^3 - GAIN FACTOR
12 alpha_bar=10;                          // per cm - LOSS
   COEFFICIENT
13 L=250*10^(-4);                      //cm - LENGTH OF OPTICAL
   CAVITY
14 W=100*10^(-4);                      //cm - WIDTH OF OPTICAL
   CAVITY
15
16 // Reflectivity for normal incidence
17 r=((n-1)/(n+1))^2;
18
19 // Threshold current density
20 Jth=1/beeta_bar*(alpha_bar+1/L*log(1/r));
21
22 // Threshold current
23 Ith=Jth*W*L;
24
25 // Displaying the Results in Command Window
26 printf("\n\n\t Threshold current density is %0.2f X
   10^3 A/cm^2.",Jth/10^3);
27 printf("\n\n\t Threshold current is %0.1f mA.",Ith
   /10^(-3));

```

Scilab code Exa 6.6 Calculation of external power efficiency of the device

```

1 //Example 6.6
2 //Program to calculate the external power efficiency
   of the device

```

```

3
4 clear all;
5 clc ;
6 close ;
7
8 // Given data
9 eeta_t=0.18;           /* *100 percent - TOTAL
                           EFFICIENCY
10 Eg=1.43;              //eV - ENERGY BAND GAP OF GaAs
11 V=2.5;                //Volts - APPLIED VOLTAGE
12
13 // External power efficiency of the device
14 eeta_ep=eeta_t*Eg/V;
15
16 // Displaying the Result in Command Window
17 printf("\n\n\t External power efficiency of GaAs
           device is %1.0f percent.",eeta_ep*100);

```

Scilab code Exa 6.7 Comparision of the ratio of threshold current densities at 20 C and 80 C for AlGaAs and InGaAsP

```

1 //Example 6.7
2 //Program to compare the ratio of threshold current
   densities at 20 C
3 //and 80 C for AlGaAs and InGaAsP
4
5 clear all;
6 clc ;
7 close ;
8
9 // Given data
10 T1=293;                 // degree C
11 T2=352;                 // degree C
12
13 // For AlGaAs

```

```

14 T0=170;           // degree C
15 Jth_20=exp(T1/T0);
16 Jth_80=exp(T2/T0);
17 Ratio=Jth_80/Jth_20;
18
19 // Displaying the Result in Command Window
20 printf("\n\n\t Ratio of current densities for AlGaAs
21      is %0.2f .",Ratio);
22
23 //For InGaAsP
24 T0=55;           // degree C
25 Jth_20=exp(T1/T0);
26 Jth_80=exp(T2/T0);
27 Ratio=Jth_80/Jth_20;
28
29 // Displaying the Result in Command Window
30 printf("\n\n\t Ratio of current densities for
31      InGaAsP is %0.2f .",Ratio);

```

Scilab code Exa 6.8 Determination of RMS value of the power fluctuation and RMS noise current at the output of the detector

```

1 //Example 6.8
2 //Determine the
3 // (a)The RMS value of the power fluctuation
4 // (b)The RMS noise current at the output of the
5 //      detector
6
7 clear all;
8 clc ;
9
10 //Given data
11 B=100*10^6;           //Hz - BANDWIDTH
12 S_rinf_by_Pebarsquare=10^(-15); // per Hz - RIN

```

```

    VALUE
13 e=1.602*10^(-19);                                // Coulombs - CHARGE
    OF AN ELECTRON
14 eeta=0.6;                                         /*100 percent -
    QUANTUM EFFICIENCY
15 lambda=1.55*10^(-6);                            // metre -
    WAVELENGTH
16 h= 6.626*10^(-34);                             // J/K - PLANK' s
    CONSTANT
17 c=2.998*10^8;                                    //m/s - VELOCITY OF
    LIGHT IN VACCUM
18 Pe_bar=2*10^(-3);                               //Watt - INCIDENT
    POWER
19
20 // (a)The RMS value of the power fluctuation
21 RMS_value=sqrt(S_rinf_by_Pebarsquare*B);
22
23 // (b)The RMS noise current at the output of the
    detector
24 RMS_noise_current=e*eeta*lambda/(h*c)*RMS_value*
    Pe_bar;
25
26 // Displaying the Results in Command Window
27 printf("\n\n\t (a)The RMS value of the power
    fluctuation is %0.2f X 10^(-4) W.",RMS_value
    /10^(-4));
28 printf("\n\n\t (b)The RMS noise current at the
    output of the detector is %0.2f X 10^(-7) A.",
    RMS_noise_current/10^(-7));

```

Chapter 7

OPTICAL SOURCES 2 THE LIGHT EMITTING DIODE

Scilab code Exa 7.1 Determination of total carrier recombination lifetime and the power internally generated within the device

```
1 //Example 7.1
2 //Program to determine the total carrier
   recombination lifetime and
3 //the power internally generated within the device
4
5 clear all;
6 clc ;
7 close ;
8
9 //Given data
10 Tau_r=60;           //ns – RADIATIVE RECOMBINATION
   LIFETIME
11 Tau_nr=100;         //ns – NON RADIATIVE
   RECOMBINATION LIFETIME
12 Lambda=0.87*10^-6; //metres – PEAK EMISSION
   WAVELENGTH
13 c= 2.998*10^8;     //m/s – SPEED OF LIGHT
14 h= 6.626*10^(-34); //J/K – PLANK's CONSTANT
```

```

15 e=1.602*10^(-19); //Coulombs – CHARGE OF AN
ELECTRON
16 i=40*10^(-3); //A – DRIVE CURRENT
17
18 //Total carrier recombination lifetime
19 Tau=Tau_r*Tau_nr/(Tau_r+Tau_nr);
20
21 //Internal quantum efficiency
22 eeta_int=Tau/Tau_r;
23
24 //Power internally generated within the device
25 P_int=eeta_int*h*c*i/(Lambda*e);
26
27 //Displaying the Results in Command Window
28 printf("\n\n\t Total carrier recombination lifetime
is %0.1f ns.",Tau);
29 printf("\n\n\t Power internally generated within the
device is %0.1f mW .",P_int/10^(-3));

```

Scilab code Exa 7.2 Calculation of optical power emitted into air as a percentage of internal optical power and the external power efficiency

```

1 //Example 7.2
2 //Program to :
3 // (a) Calculate the optical power emitted into air as
   a percentage of
4 //internal optical power
5 // (b) Determine the external power efficiency
6
7 clear all;
8 clc ;
9 close ;
10
11 // Given data
12 F=0.68; //TRANSMISSION FACTOR

```

```

13 n=1;
14 nx=3.6; //REFRACTIVE INDEX OF GaAs
15 Pint_by_P=0.5; // *100 percent = Pe/P
16
17 //Percentage optical power emitted
18 Pe_by_Pint=F*n^2/(4*nx^2);
19
20 //External power efficiency
21 eeta_ep=Pe_by_Pint*Pint_by_P;
22
23 //Displaying the Results in Command Window
24 printf("\n\n\t(a) Percentage optical power emitted
           is %0.1f percent of generated optical power.", 
           Pe_by_Pint*100);
25 printf("\n\n\t(b) External power efficiency is %0.2f
           percent.", eeta_ep*100);

```

Scilab code Exa 7.3 Calculation of Coupling Efficiency and Optical loss in decibels relative to Pe and Pint

```

1 //Example 7.3
2 //Program to calculate the:
3 // (a) Coupling Efficiency
4 // (b) Optical loss in decibels relative to Pe
5 // (c) Optical loss in decibels relative to Pint
6
7 clear all;
8 clc ;
9 close ;
10
11 // Given data
12 NA=0.2; //NUMERICAL APERTURE
13 F=0.68; //TRANSMISSION FACTOR
14 n=1;
15 nx=3.6; //REFRACTIVE INDEX OF GaAs

```

```

16
17 // (a) Coupling Efficiency
18 eeta_c=(NA)^2;
19
20 // (b) Optical loss in decibels relative to Pe
21 Loss1=-10*log10(eeta_c);
22
23 // Percentage optical power emitted
24 Pint_by_P=F*n^2/(4*nx^2);
25
26 // (c) Optical loss in decibels relative to Pint
27 Loss2=-10*log10(eeta_c*Pint_by_P);
28
29 // Displaying the Results in Command Window
30 printf("\n\n\t (a) Coupling Efficiency is %1.0f
percent.",eeta_c*100);
31 printf("\n\n\t (b) Optical loss in decibels relative
to Pe is %0.1f dB.",Loss1);
32 printf("\n\n\t (c) Optical loss in decibels relative
to Pint is %0.1f dB.",Loss2);

```

Scilab code Exa 7.4 Estimation of the optical power coupled into the fiber

```

1 //Example 7.4
2 //Program to estimate the optical power coupled into
   the fiber
3
4 clear all;
5 clc ;
6 close ;
7
8 // Given data
9 d=50*10^(-4);           //cm - EMISSION AREA
   DIAMETER
10 R_D=30;                 //W/ sr/cm^2

```

```

11 NA=0.15;                      //NUMERICAL APERTURE
12 r=0.01;                        //REFLECTION COEFFICIENT
13
14 //Optical power coupled into the fiber
15 a=d/2;                          //RADIUS
16 A=%pi*a^2;                     //EMISSION AREA
17 Pc=%pi*(1-r)*A*R_D*NA^2;
18
19 //Displaying the Result in Command Window
20 printf("\n\n\t Optical power coupled into the fiber
      is %0.1f uW.",Pc/10^(-6));

```

Scilab code Exa 7.5 Determination of the overall power conversion efficiency

```

1 //Example 7.5
2 //Program to determine the overall power conversion
   efficiency
3
4 clear all;
5 clc ;
6 close ;
7
8 //Given data
9 Pc=190*10^(-6);                //Watts – INPUT OPTICAL POWER
10 I=25*10^(-3);                 //A – FORWARD CURRENT
11 V=1.5;                         //V – FORWARD VOLTAGE
12
13 //Overall power conversion efficiency
14 P=I*V;
15 eeta_pc=Pc/P;
16
17 //Displaying the Result in Command Window
18 printf("\n\n\t Overall power conversion efficiency
      is %0.1f percent.",eeta_pc*100);

```

Scilab code Exa 7.6 Comparision of electrical and optical bandwidth for an optical fiber commuication system

```
1 //Example 7.6
2 //Compare the electrical and optical bandwidth for
   an optical fiber
3 //commuication system and develop a relationship
   between the two
4
5 clear all;
6 clc ;
7 close ;
8
9 //Given data
10 Re_dB=3;                                //dB – ELECTRICAL 3 dB
    POINTS
11 Ro_dB=3;                                //dB – OPTICAL 3 dB
    POINTS
12
13 // Electrical Bandwidth
14 Iout_by_Iin=sqrt(10^(-Re_dB/10));
15 printf("\n\n\t For Electrical Bandwidth , Iout/Iin =
    %0.3f .",Iout_by_Iin);
16
17 //Optical Bandwidth
18 Iout_by_Iin=10^(-Ro_dB/10);
19 printf("\n\n\t For Optical Bandwidth , Iout/Iin = %0
    .1f .",Iout_by_Iin);
```

Scilab code Exa 7.7 Determination of optical output power modulated at frequencies of 20 MHz and 100 MHz

```

1 //Example 7.7
2 //Determine the optical output power modulated at
   frequencies
3 //(a) 20 MHz
4 //(b) 100 MHz
5 //Also determine electrical and optical bandwidths
6
7 clear all;
8 clc ;
9 close ;
10
11 //Given data
12 P_dc=300*10^(-6);           //Watt – OPTICAL OUTPUT
   POWER
13 tau_i=5*10^(-9);           //s – CARRIER
   RECOMBINATION LIFETIME
14
15 //(a) Optical output power at 20 MHz
16 f=20*10^6;                 //Hz – OPERATING FREQUENCY
17 Pe=P_dc/sqrt(1+(2*pi*f*tau_i)^2);
18 printf("\n\n\t(a) Optical output power at %1.0f MHz,
   Pe(%1.0f MHz) = %0.2f uW.",f/10^6,f/10^6,Pe
   /10^(-6));
19
20 //(b) Optical output power at 100 MHz
21 f=100*10^6;                //Hz – OPERATING FREQUENCY
22 Pe=P_dc/sqrt(1+(2*pi*f*tau_i)^2);
23 printf("\n\n\t(b) Optical output power at %1.0f MHz,
   Pe(%1.0f MHz) = %0.2f uW.",f/10^6,f/10^6,Pe
   /10^(-6));
24
25 //Optical Bandwidth
26 Bopt=sqrt(3)/(2*pi*tau_i);
27 printf("\n\n\t Optical Bandwidth , Bopt = %0.1f MHz."
   ,Bopt/10^6);
28
29 //Electrical Bandwidth
30 B=Bopt/sqrt(2);

```

```
31 printf("\n\n\t Electrical Bandwidth , B = %0.1f MHz."
,B/10^6);
```

Scilab code Exa 7.8 Estimation of the CW operating lifetime for the given LED

```
1 //Example 7.8
2 //Program to estimate the CW operating lifetime for
   the given LED
3
4 clear all;
5 clc ;
6 close ;
7
8 //Given data
9 Ea=1*1.602*10^(-19); // Joules – ACTIVATION ENERGY
10 k=1.38*10^(-23); //m^2 kg/s – BOLTZMANN' s
   CONSTANT
11 T=290; // Kelvin – JUNCTION
   TEMPERATURE
12 Pe_by_Pout=0.67; //Pe/Pout RATIO
13 Beeta_o=1.84*10^7; //per h – CONSTANT OF
   PROPORTIONALITY
14
15 //Degradation Rate
16 Beeta_r=Beeta_o*exp(-Ea/(k*T));
17
18 //CW operating lifetime for the given LED
19 t=log(Pe_by_Pout)/-Beeta_r;
20
21 //Displaying the Result in Command Window
22 printf("\n\n\t CW operating lifetime for the given
   LED is %0.1f X 10^9 h.",t/10^9);
```

Chapter 8

OPTICAL DETECTORS

Scilab code Exa 8.1 Determination of the quantum efficiency and responsivity of the photodiode

```
1 //Example 8.1
2 //Program to determine the Quantum efficiency and
   Responsivity of
3 //the photodiode
4
5 clear all;
6 clc ;
7 close ;
8
9 // Given data
10 Lambda=0.85*10^-6;                      // metres -
   WAVELENGTH
11 e=1.602*10^(-19);                        // Coulombs - CHARGE
   OF AN ELECTRON
12 h= 6.626*10^(-34);                      // J/K - PLANK' s
   CONSTANT
13 c=2.998*10^8;                           //m/s - VELOCITY OF
   LIGHT IN VACCUM
14 Ne=1.2*10^11;                            //NUMBER OF
   ELECTRONS COLLECTED
```

```

15 Np=3*10^11; //NUMBER OF
    INCIDENT PHOTONS
16
17 //Quantum Efficiency
18 eeta=Ne/Np;
19
20 //Responsivity
21 R=eeta*e*Lambda/(h*c);
22
23 //Displaying the Results in Command Window
24 printf("\n\n\t Quantum Efficiency = %0.1f .",eeta);
25 printf("\n\n\t Responsivity , R = %0.3f A/W .",R);

```

Scilab code Exa 8.2 Determination of operating wavelength and incident optical power

```

1 //Example 8.2
2 //Program to determine:
3 // (a) Operating Wavelength
4 // (b) Incident Optical Power
5
6 clear all;
7 clc ;
8 close ;
9
10 //Given data
11 eeta=0.65; // *100 percent -
    QUANTUM EFFICIENCY
12 e=1.602*10^(-19); // Coulombs - CHARGE
    OF AN ELECTRON
13 h=6.626*10^(-34); // J/K - PLANK' s
    CONSTANT
14 c=2.998*10^8; // m/s - VELOCITY OF
    LIGHT IN VACCUM
15 Ip=2.5*10^(-6); // A - PHOTOCURRENT

```

```

16 E=1.5*10^(-19); // J – ENERGY OF
PHOTONS
17
18 // (a) Operating Wavelength
19 Lambda=h*c/E;
20
21 // Responsivity
22 R=eeta*e*Lambda/(h*c);
23
24 // (b) Incident Optical Power
25 Po=Ip/R;
26
27 // Displaying the Results in Command Window
28 printf("\n\n\t(a) Operating Wavelength = %0.2f um.", ,
Lambda/10^(-6));
29 printf("\n\n\t(b) Incident Optical Power = %0.2f uW.
", Po/10^(-6));

```

Scilab code Exa 8.3 Determination of wavelength above which an intrinsic photodetector will cease to operate

```

1 //Example 8.3
2 //Program to determine the wavelength above which an
intrinsic
3 //photodetector will cease to operate
4
5 clear all;
6 clc ;
7 close ;
8
9 // Given data
10 e=1.602*10^(-19); // Coulombs – CHARGE
OF AN ELECTRON
11 h=6.626*10^(-34); // J/K – PLANK' s
CONSTANT

```

```

12 c=2.998*10^8; //m/s - VELOCITY OF
    LIGHT IN VACCUM
13 Eg=1.43*e; //V - BANDGAP
    ENERGY
14
15 //Wavelength determination
16 Lambda_c=h*c/Eg;
17
18 //Displaying the Result in Command Window
19 printf("\n\n\t The wavelength above which an
        intrinsic photodetector will cease to operate is
        %0.2f um.",Lambda_c/10^(-6));

```

Scilab code Exa 8.4 Determination of drift time of the carriers and junction capacitance of the photodiode

```

1 //Example 8.4
2 //Program to determine:
3 // (a) Drift time of the carriers
4 // (b) Junction capacitance of the photodiode
5
6 clear all;
7 clc ;
8 close ;
9
10 //Given data
11 w=20*10^(-6); //metre - WIDTH OF INTRINSIC
    REGION
12 r=500*10^(-6); //metre - RADIUS
13 epsilon_s=10.5*10^(-11); //F/m - PERMITTIVITY
14 vd=10^5; //m/s - DRIFT VELOCITY OF
    ELECTRONS
15
16 // (a) Drift time of the carriers
17 t_drift=w/vd;

```

```

18
19 // (b) Junction capacitance of the photodiode
20 A=%pi*r^2;
21 Cj=epsilon_s*A/w;
22
23 // Displaying the Results in Command Window
24 printf("\n\n\t (a) Drift time of the carriers is %1.0
   f ps.",t_drift/10^(-12));
25 printf("\n\n\t (b) Junction capacitance of the
   photodiode is %1.0 f pF.",Cj/10^(-12));

```

Scilab code Exa 8.5 Determination of maximum response time for the device

```

1 //Example 8.5
2 //Program to determine maximum response time for the
   device
3
4 clear all;
5 clc ;
6 close ;
7
8 //Given data
9 w=25*10^(-6);           //metre – WIDTH OF DEPLETION
   REGION
10 vd=3*10^4;             //m/s – DRIFT VELOCITY OF
   CARRIER
11
12 //Maximum 3 dB Bandwidth
13 Bw=vd/(2*pi*w);
14
15 //Maximum response time
16 t=1/Bw;
17
18 // Displaying the Result in Command Window

```

```
19 printf("\n\n\t Maximum response time for the device  
is %0.1f ns.",t/10^(-9));
```

Scilab code Exa 8.6 Calculation of noise equivalent power and specific detectivity for the device

```
1 //Example 8.6  
2 //Program to calculate the noise equivalent power  
// and specific  
3 //detectivity for the device  
4  
5 clear all;  
6 clc ;  
7 close ;  
8  
9 //Given data  
10 Id=8*10^(-9); //A – DARK CURRENT  
11 eeta=0.55; ///*100 – QUANTUM EFFICIENCY  
12 Lambda=1.3*10^(-6); //metre – OPERATING  
//WAVELENGTH  
13 A=100*50*(10^(-6))^2; //m^2 – AREA  
14 e=1.602*10^(-19); //Coulombs – CHARGE OF AN  
//ELECTRON  
15 h= 6.626*10^(-34); //J/K – PLANK' s CONSTANT  
16 c=2.998*10^8; //m/s – VELOCITY OF LIGHT IN  
//VACCUM  
17  
18 //Noise equivalent power  
19 NEP=h*c*sqrt(2*e*Id)/(eeta*e*Lambda);  
20  
21 //Specific detectivity  
22 D=sqrt(A)/NEP;  
23  
24 //Displaying the Results in Command Window  
25 printf("\n\n\t Noise equivalent power = %0.2f X
```

```

10^(-14) W." ,NEP/10^(-14));
26 printf("\n\n\t Specific detectivity = %0.1f X 10^8 m
H^(1/2)/W.",D/10^(8));

```

Scilab code Exa 8.7 Determination of the multiplication factor of the photodiode

```

1 //Example 8.7
2 //Program to determine the multiplication factor of
   the photodiode
3
4 clear all;
5 clc ;
6 close ;
7
8 //Given data
9 eeta=0.80;                                /*100 percent -
   QUANTUM EFFICIENCY
10 e=1.602*10^(-19);                         //Coulombs - CHARGE
   OF AN ELECTRON
11 h=6.626*10^(-34);                         //J/K - PLANK' s
   CONSTANT
12 c=2.998*10^8;                            //m/s - VELOCITY OF
   LIGHT IN VACCUM
13 Lambda=0.9*10^(-6);                      //metre - OPERATING
   WAVELENGTH
14 I=11*10^(-6);                            //A - OUTPUT
   CURRENT
15 Po=0.5*10^(-6);                          //Watt - INCIDENT
   OPTICAL POWER
16
17 //Responsivity
18 R=eeta*e*Lambda/(h*c);
19 //Photocurrent
20 Ip=Po*R;

```

```

21 // Multiplication Factor
22 M=I/Ip;
23
24 // Displaying the Result in Command Window
25 printf("\n\n\t The multiplication factor of the
           photodiode is approximately %1.0f." ,M);

```

Scilab code Exa 8.8 Determination of optical gain of the device and common emitter current gain

```

1 //Example 8.8
2 //Program to determine:
3 // (a) Optical gain of the device
4 // (b) Common emitter current gain
5
6 clear all;
7 clc ;
8 close ;
9
10 // Given data
11 eeta=0.40;                                /*100 percent -
   QUANTUM EFFICIENCY
12 e=1.602*10^(-19);                         // Coulombs - CHARGE
   OF AN ELECTRON
13 h=6.626*10^(-34);                         // J/K - PLANK' s
   CONSTANT
14 c=2.998*10^8;                            // m/s - VELOCITY OF
   LIGHT IN VACCUM
15 Lambda=1.26*10^(-6);                      // metre - OPERATING
   WAVELENGTH
16 Ic=15*10^(-3);                           // A - COLLECTOR
   CURRENT
17 Po=125*10^(-6);                          // Watt - INCIDENT
   OPTICAL POWER
18

```

```

19 // (a) Optical Gain
20 Go=h*c*Ic/(Lambda*e*Po);
21
22 // (b) Common emitter current gain
23 h_FE=Go/eeta;
24
25 // Displaying the Results in Command Window
26 printf("\n\n\t(a) Optical Gain , Go = %0.1f ." ,Go);
27 printf("\n\n\t(b) Common emitter current Gain , h_FE
           = %0.1f ." ,h_FE);

```

Scilab code Exa 8.9 Determination of the maximum 3 dB bandwidth permitted by the device

```

1 //Example 8.9
2 //Program to determine the maximum 3 dB bandwidth
   permitted by the
3 //device
4
5 clear all;
6 clc ;
7 close ;
8
9 //Given data
10 tf=5*10^(-12);           //second - ELECTRON TRANSIT
    TIME
11 G=70;                   //PHOTOCONDUCTIVE GAIN
12
13 //Maximum 3 dB bandwidth permitted by the MSM
14 Bm=1/(2*pi*tf*G);
15
16 //Displaying the Result in Command Window
17 printf("\n\n\t Maximum 3 dB bandwidth permitted by
           the device is %0.1f MHz." ,Bm/10^6);

```

Chapter 9

DIRECT DETECTION RECEIVER PERFORMANCE CONSIDERATIONS

Scilab code Exa 9.1 Determination of the theoretical quantum limit at the receiver and the minimum incident optical power

```
1 //Example 9.1
2 //Note: MAXIMA SCILAB TOOLBOX REQUIRED FOR THIS
   PROGRAM
3 //Program to determine:
4 // (a)The theoretical quantum limit at the receiver
   in terms of quantum
5 //efficiency and energy of incident photon
6 // (b)The minimum incident optical power
7
8 clear all;
9 clc ;
10 close ;
11
12 syms h f eeta;
13
14 // (a)The theoretical quantum limit at the receiver
```

```

        in terms of quantum
15 //efficiency and energy og incident photon
16 BER=10^(-9);                      //BIT ERROR RATE
17 z_min=-log(BER)
18 E_min=z_min*h*f/eeta;
19 disp(E_min,"(a)The theoretical quantum limit at the
    receiver in terms of quantum efficiency and
    energy of incident photon is =");
20 printf(" which is equivalent to %0.1f h*f/eeta.",
    z_min);
21
22 // (b)The minimum incident optical power
23 h1= 6.626*10^(-34);                  //J/K - PLANK's
    CONSTANT
24 f1=2.998*10^14;                     //Hz - FREQUENCY
25 Bt=10*10^6;                         //bit/s -
    SIGNALING RATE
26 eeta1=1;                            //*100 percent -
    QUANTUM EFFICIENCY
27 Po_binary=z_min*h1*f1*Bt/(2*eeta1);
28 Po=10*log10(Po_binary/10^(-3));
29 printf("\n\n (b)The minimum incident optical power
    is %0.1f pW or %0.1f dBm.",Po_binary/10^(-12),Po)
;

```

Scilab code Exa 9.2 Calculation of incident optical power to achieve given SNR

```

1 //Example 9.2
2 //Program to calculate incident optical power to
    achieve given SNR
3
4 clear all;
5 clc ;
6 close ;

```

```

7
8 // Given data
9 SNR=50;                                //dB - SIGNAL TO
10 h= 6.626*10^(-34);                    //J/K - PLANK' s
11 Lambda=1*10^(-6);                     //metre - OPERATING
12 c=2.998*10^8;                         //m/s - VELOCITY OF
13 B=5*10^6;                             //MHz - POST
14 eeta=1;                               /*100 percent -
15
16 // Incident optical power to achieve given SNR
17 Po=2*h*c*B*10^(SNR/10)/(eeta*Lambda);
18
19 // Displaying the Result in Command Window
20 printf("\n\n The incident optical power is %0.1f nW
or %0.1f dBm.",Po/10^(-9),10*log10(Po/10^(-3)));

```

Scilab code Exa 9.3 Comparision of the shot noise generated in the photodetector with the thermal noise in the load resistor

```

1 //Example 9.3
2 //Program to compare the shot noise generated in the
   photodetector
3 //with the thermal noise in the load resistor
4
5 clear all;
6 clc ;
7 close ;
8
9 // Given data

```

```

10 Id=3*10^(-9); //A – DARK CURRENT
11 e=1.602*10^(-19); //Coulombs – CHARGE
    OF AN ELECTRON
12 h= 6.626*10^(-34); //J/K – PLANK' s
    CONSTANT
13 Lambda=0.9*10^(-6); //metre – OPERATING
    WAVELENGTH
14 c=2.998*10^8; //m/s – VELOCITY OF
    LIGHT IN VACCUM
15 eeta=0.6; //*100 percent –
    QUANTUM EFFICIENCY
16 Po=200*10^(-9); //Watt– INCIDENT
    OPTICAL POWER
17 k=1.381*10^(-23); //m^2 kg/s –
    BOLTZMANN' s CONSTANT
18 T=293; //Kelvin –
    TEMPERATURE
19 B=5*10^6; //Hz – BANDWIDTH OF
    RECEIVER
20 Rl=4*10^3; //Ohms – LOAD
    RESISTANCE
21
22 //RMS shot noise current
23 Ip=eeta*Po*e*Lambda/(h*c);
24 Shot_noise_current=sqrt(2*e*B*(Id+Ip));
25
26 //RMS thermal noise current
27 Thermal_noise_current=sqrt(4*k*T*B/Rl);
28
29 // Displaying the Results in Command Window
30 printf("\n\n RMS shot noise current = %0.3f X
        10^(-10) A.",Shot_noise_current/10^(-10));
31 printf("\n\n RMS thermal noise current = %0.3f X
        10^(-9) A.",Thermal_noise_current/10^(-9));

```

Scilab code Exa 9.4 Determination of SNR at the output of the receiver

```
1 //Example 9.4
2 //Program to determine SNR at the output of the
   receiver
3
4 clear all;
5 clc ;
6 close ;
7
8 //Given data
9 Id=3*10^(-9);           //A – DARK CURRENT
10 e=1.602*10^(-19);      //Coulombs – CHARGE
    OF AN ELECTRON
11 h= 6.626*10^(-34);    //J/K – PLANK' s
    CONSTANT
12 Lambda=0.9*10^(-6);   //metre – OPERATING
    WAVELENGTH
13 c=2.998*10^8;         //m/s – VELOCITY OF
    LIGHT IN VACCUM
14 eeta=0.6;              //*100 percent –
    QUANTUM EFFICIENCY
15 Po=200*10^(-9);       //Watt– INCIDENT
    OPTICAL POWER
16 k=1.381*10^(-23);     //m^2 kg/s –
    BOLTZMANN' s CONSTANT
17 T=293;                 //Kelvin –
    TEMPERATURE
18 B=5*10^6;              //Hz – BANDWIDTH OF
    RECEIVER
19 Rl=4*10^3;              //Ohms – LOAD
    RESISTANCE
20 Fn=3;                  //dB – AMPLIFIER
    NOISE FIGURE
21
22 //RMS shot noise current
23 Ip=eeta*Po*e*Lambda/(h*c);
24 Shot_noise_current=sqrt(2*e*B*(Id+Ip));
```

```

25 //RMS thermal noise current
26 Thermal_noise_current=sqrt(4*k*T*B/R1);
27
28 //SNR Calculation
29 SNR=Ip^2/(Shot_noise_current^2+Thermal_noise_current
   ^2*10^(Fn/10));
30
31 // Displaying the Result in Command Window
32 printf("\n\n SNR = %0.2f dB.", 10*log10(SNR));

```

Scilab code Exa 9.5 Calculation of maximum load resistance and bandwidth penalty considering amplifier capacitance

```

1 //Example 9.5
2 //Program to :
3 // (i) Calculate Maximum Load Resistance
4 // (ii) Determine Bandwidth Penalty considering
   amplifier capacitance
5
6 clear all;
7 clc ;
8 close ;
9
10 // Given data
11 Cd=6*10^(-12);           // Farad - PHOTODIODE
   CAPACITANCE
12 Ca=6*10^(-12);           // Farad - AMPLIFIER INPUT
   CAPACITANCE
13 B=8*10^6;                 // Hz - POST DETECTION
   BANDWIDTH
14
15 // (i) Maximum Load Resistance
16 Rl=1/(2*pi*Cd*B);
17
18 // (ii) Maximum Bandwidth considering amplifier

```

```

    capacitance
19 Bm=1/(2*pi*Rl*(Cd+Ca));
20
21 // Displaying the Results in Command Window
22 printf("\n\n\t(i) Maximum Load Resistance , Rl(max) =
    %0.2f kiloOhms." ,Rl/10^3);
23 printf("\n\n\t(ii) Maximum Bandwidth considering
    amplifier capacitance , B = %1.0f MHz." ,Bm/10^6);

```

Scilab code Exa 9.6 Determination of the maximum SNR improvement

```

1 //Example 9.6
2 //Program to determine the maximum SNR improvement
   between
3 //M=1 and M=Mop
4
5 clear all;
6 clc ;
7 close ;
8
9 //Given data
10 Cd=5*10^(-12);                                //Farad - APD
   CAPACITANCE
11 B=50*10^6;                                     //Hz - POST
   DETECTION BANDWIDTH
12 T=291;                                         //Kelvin -
   TEMPERATURE
13 k=1.381*10^(-23);                            //m^2 kg/s -
   BOLTZMANN' s CONSTANT
14 Id=0;                                           //A - DARK CURRENT
15 x=0.3;
16 Fn=1;                                         //dB - AMPLIFIER
   NOISE FIGURE
17 e=1.602*10^(-19);                            //Coulombs - CHARGE
   OF AN ELECTRON

```

```

18 Ip=10^(-7); //A – PHOTOCURRENT
19
20 //Maximum Load Resistance
21 Rl=1/(2*pi*Cd*B);
22
23 //For M=1
24 M=1
25 SNR1=Ip^2*M^2/(2*e*B*(Ip+Id)*M^(2+x)+4*k*T*B*Fn/Rl);
26 //Displaying the Result in Command Window
27 printf("\n\n For M = 1, SNR = %0.2f dB.", 10*log10(
    SNR1));
28
29 //For M=Mop
30 Mop=(4*k*T/(x*e*Rl*Ip))^(1/(2+x));
31 M=Mop;
32 SNR2=Ip^2*M^2/(2*e*B*(Ip+Id)*M^(2+x)+4*k*T*B*Fn/Rl);
33 //Displaying the Result in Command Window
34 printf("\n\n For M = Mopt, SNR = %0.2f dB.", 10*log10(
    SNR2));
35 printf("\n\n SNR Improvement = %0.2f dB.", 10*log10(
    SNR2)-10*log10(SNR1));

```

Scilab code Exa 9.7 Determination of the optimum avalanche multiplication factor

```

1 //Example 9.7
2 //Program to determine the optimum avalanche
   multiplication factor
3
4 clear all;
5 clc ;
6 close ;
7
8 //Given data
9 Rl=10*10^3; //Ohms – LOAD

```

```

    RESISTANCE
10 T=120;                                // Kelvin -
    TEMPERATURE
11 SNR=35;                                 //dB - SIGNAL TO
    NOISE RATIO
12 Fn=1;                                   //dB - AMPLIFIER
    NOISE FIGURE
13 B=10*10^6;                             //Hz - POST
    DETECTION BANDWIDTH
14 x=1;                                     //m^2 kg/s -
15 k=1.381*10^(-23);                      BOLTZMANN' s CONSTANT
16 e=1.602*10^(-19);                      //Coulombs - CHARGE
    OF AN ELECTRON
17
18 //As Ip=10*Id , Minimum Photo Current
19 Ip=(10^(SNR/10)*(12*k*T*B*10^(Fn/10)/R1)/(4*k*T*10^(Fn/10)/(1.1*e*R1))^(2/(2+x)))^(3/4);
20
21 //Optimum avalanche multiplication factor
22 Mop=(4*k*T*10^(Fn/10)/(e*R1/10*1.1*Ip))^(1/(2+x));
23
24 // Displaying the Result in Command Window
25 printf("\n\n Optimum avalanche multiplication factor
    , Mop = %0.2f ." ,Mop);

```

Scilab code Exa 9.8 Determination of Maximum bandwidth Mean square thermal noise current for high input impedance and transimpedance amplifier

```

1 //Example 9.8
2 //Program to determine:
3 // (a)Maximum bandwidth without equilization
4 // (b)Mean square thermal noise current per unit
    bandwidth
5 // (c)(Compare (a) and (b) for transimpedance

```

```

        amplifier
6
7 clear all;
8 clc ;
9 close ;
10
11 //Given data
12 Ra=4*10^6;                                //Ohms - INPUT
13 Rb=4*10^6;                                //Ohms - DETECTOR
14 Ct=6*10^(-12);                            //Farad - TOTAL
15 k=1.381*10^(-23);                         //m^2 kg/s -
16 Boltzmann's CONSTANT
16 T=300;                                     //Kelvin -
17 TEMPERATURE
17 Rf=100*10^3;                               //Ohms - LOAD
18 RESISTANCE
18 G=400;                                     //OPEN LOOP GAIN OF
18 TRANSIMPEDANCE AMP.
19
20 //Total effective load resistance
21 Rtl=Rb*Ra/(Rb+Ra);
22
23 // (a) Maximum bandwidth without equilization
24 B=1/(2*pi*Rtl*Ct)
25
26 // (b) Mean square thermal noise current per unit
26 bandwidth
27 it_sq_bar=4*k*T/Rtl;
28
29 // (c) (Compare (a) and (b) for transimpedance
29 amplifier
30 B1=G/(2*pi*Rf*Ct)
31 it_sq_bar1=4*k*T/Rf;
32
33 // Displaying the Results in Command Window

```

```

34 printf("For High Gain Transimpedance Amplifier:")
35 printf("\n\n (a)Maximum bandwidth without
            equilization , B = %0.2f X 10^4 Hz.",B/10^4);
36 printf("\n\n (b)Mean square thermal noise current
            per unit bandwidth , it_sq_bar = %0.2f X 10^{(-27)}
            A^2/Hz.",it_sq_bar/10^{(-27)});
37 printf("\n\n (c)For High Gain Transimpedance
            Amplifier:")
38 printf("\n\n     Maximum bandwidth without
            equilization , B = %0.2f X 10^8 Hz.",B1/10^8);
39 printf("\n\n     Mean square thermal noise current
            per unit bandwidth , it_sq_bar = %0.2f X 10^{(-25)}
            A^2/Hz.",it_sq_bar1/10^{(-25)});
40 printf("\n\n     Mean square thermal noise current for
            transimpedance amplifier is %1.0f times or %1.0f
            dB greater.",it_sq_bar1/it_sq_bar,10*log10(
            it_sq_bar1/it_sq_bar));

```

Chapter 10

OPTICAL AMPLIFICATION WAVELENGTH CONVERSION AND REGENERATION

Scilab code Exa 10.1 Determination of Refractive Index of active medium and 3dB Spectral Bandwidth

```
1 //Example 10.1
2 //Program to determine the Refractive Index of the
   Active Medium and
3 //the 3dB spectral bandwidth of the device
4
5 clear all;
6 clc ;
7 close ;
8
9 // Given data
10 L=300*10^-6;           // metres – ACTIVE REGION
    LENGTH
11 Lambda=1.5*10^-6;      // metres – PEAK GAIN
    WAVELENGTH
```

```

12 Delta_Lambda=1*10^-9; //metres – MODE SPACING
13 c= 2.998*10^8; //m/s – SPEED OF LIGHT
14 Gs_dB=4.8; //dB – SINGLE PASS GAIN
15 R1=0.3; //INPUT FACET REFRACTIVITY
16 R2=0.3; //OUTPUT FACET REFRACTIVITY
17
18 //Refractive Index of the active medium at the peak
   gain wavelength
19 n=(Lambda^2)/(2*Delta_Lambda*L);
20
21 //Gain Gs from Gs_dB by taking antilog with base 10
22 Gs=10^((1/10)*Gs_dB);
23
24 //3dB spectral Bandwidth
25 B_fpa=(c/(%pi*n*L))*asin((1-sqrt(R1*R2)*Gs)/(2*sqrt(
   sqrt(R1*R2)*Gs)));
26
27 //Displaying the Results in Command Window
28 printf("\n\n\t Refractive Index of the active medium
      at the peak gain wavelength is %0.2f .",n);
29 printf("\n\n\t 3dB spectral Bandwidth is %0.1f GHz .
      ",B_fpa/10^9);

```

Scilab code Exa 10.2 Derivation of an approximate equation for the cavity gain of an SOA

```

1 //Example 10.2
2 //Note: MAXIMA SCILAB TOOLBOX REQUIRED FOR THIS
   PROGRAM
3 //Program to derive an approximate equation for the
   cavity gain
4 //of an SOA
5
6 clear all;
7clc ;

```

```

8 close ;
9
10 syms R1 R2;
11
12 //For 3 dB peak through ratio
13 //Let A=sqrt(R1*R2)*Gs
14 A=(1-sqrt(0.5))/(1+sqrt(0.5));
15
16 //Cavity gain
17 G=A/(1-A)^2/sqrt(R1*R2);;
18
19 //Displaying the Result in Command Window
20 disp(G,"The approximate equation of cavity gain is ,
G = ")

```

Scilab code Exa 10.3 Determination of the length of the device and the ASE noise signal power at the output of the amplifier

```

1 //Example 10.3
2 //Program to determine:
3 // (a)The length of the device
4 // (b)The ASE noise signal power at the output of the
      amplifier
5
6 clear all;
7 clc ;
8 close ;
9
10 //Given data
11 Gs_dB=30;           //dB – SINGLE PASS GAIN
12 g_bar=200;          //NET GAIN COEFFICIENT
13 m=2.2;              //MODE FACTOR
14 n_sp=4;              //SPONTANEOUS EMISSION FACTOR
15 h= 6.626*10^(-34); //J/K – PLANK' s CONSTANT
16 c=2.998*10^8;       //m/s – VELOCITY OF LIGHT IN

```

```

    VACCUM
17 B=1*10^(12);           //Hz – OPTICAL BANDWIDTH
18 Lambda=1.55*10^(-6);  //metre – OPERATING WAVELENGTH
19
20 // (a)The length of the device
21 L=Gs_dB/(10*g_bar*log10(%e));
22
23 // (b)The ASE noise signal power at the output of the
   amplifier
24 Gs=10^(Gs_dB/10);
25 f=c/Lambda;
26 P_ASE=m*n_sp*(Gs-1)*h*f*B;
27
28 // Displaying the Results in Command Window
29 printf("\n\n\t(a)The length of the SOA is %0.2f X
          10^(-3) m.",L/10^(-3));
30 printf("\n\n\t(b)The ASE noise signal power at the
          output of the amplifier, P_ASE = %0.2f mW.",P_ASE
          /10^(-3));

```

Scilab code Exa 10.4 Determination of the fiber non linear coefficient and the parametric gain in dB when it is reduced to quadratic gain

```

1 //Example 10.4
2 //Program to determine:
3 // (a)The fiber non-linear coefficient
4 // (b)The parametric gain in dB when it is reduced to
   quadratic gain
5
6 clear all;
7 clc ;
8 close ;
9
10 // Given data
11 L=500;           //metre – LENGTH

```

```

12 Lambda=1.55*10^(-6); //metre – OPERATING WAVELENGTH
13 Pp= 1.4; //W – SIGNAL POWER
14 Gp_dB=62.2; //dB – PEAK GAIN
15
16 // (a)The fiber non-linear coefficient
17 gaamma=(Gp_dB-10*log10(1/4))/(Pp*L)*1/(10*log10((%e)
    ^2));
18
19 // (b)The parametric gain in dB when it is reduced to
    quadratic gain
20 Gp_dB1=10*log10((gaamma*Pp*L)^2);
21
22 //Displaying the Results in Command Window
23 printf("\n\n\t (a)The fiber non-linear coefficient
    is %0.2f X 10^(-3) per W per km.",gaamma/10^(-3))
    ;
24 printf("\n\n\t (b)The parametric gain in dB when it
    is reduced to quadratic gain is %0.1f dB.",Gp_dB1
    );

```

Scilab code Exa 10.5 Calculation of the frequency chirp variation at the output signal and the differential gain required

```

1 //Example 10.5
2 //Program to calculate:
3 // (a)The frequency chirp variation at the output
    signal
4 // (b)The differential gain required
5
6 clear all;
7 clc ;
8 close ;
9
10 // Given data
11 Lambda=1.55*10^(-6); //metre – OPERATING

```

```

        WAVELENGTH
12 alpha=-1;                      //ENHACEMENT FACTOR
13 Pin=0.5*10^(-3);               //Watt – INPUT SIGNAL POWER
14 dPin_by_dt=0.01*10^(-6);      //metre – INPUT SIGNAL
        POWER VARIATION
15 dnr_by_dn=-1.2*10^(-26);    //m^3 – DIFFERENTIAL
        REFRACTIVE INDEX
16
17 // (a)The frequency chirp variation at the output
        signal
18 del_f=-alpha/(4*%pi)*1/Pin*dPin_by_dt;
19
20 // (b)The differential gain required
21 dg_by_dn=4*%pi/Lambda*dnr_by_dn/alpha;
22
23 // Displaying the Results in Command Window
24 printf("\n\n\t (a)The frequency chirp variation at
        the output signal is %0.2f X 10^(-6)Hz.",del_f
        /10^(-6));
25 printf("\n\n\t (b)The differential gain required is
        %0.3f X 10^(-20) m^2.",dg_by_dn/10^(-20));

```

Chapter 11

INTEGRATED OPTICS AND PHOTONICS

Scilab code Exa 11.1 Determination of Voltage required to provide pi radians phase change

```
1 //Example 11.1
2 //Program to determine the Voltage required for a
   phase change of
3 //pi radians
4
5 clear all;
6 clc ;
7 close ;
8
9 //Given data
10 L=2*10^-2;           // metres – LENGTH OF THE
   WAVEGUIDE
11 Lambda=1.3*10^-6;    // metres – WAVELENGTH
12 d=25*10^-6;         // metres – DISTANCE BETWEEN
   THE ELECTRODES
13 r=30.8*10^-12;      //m/V – ELECTRO-OPTIC
   COEFFICIENT
14 n1=2.1;              //REFRACTIVE INDEX AT 1.3um
```

WAVELENGTH

```
15
16 // Calculation of the Voltage required for a phase
   change of pi radians
17 V_pi=(Lambda*d)/((n1^3)*r*L);
18
19 // Displaying the Result in Command Window
20 printf("\n\n\t Voltage required for a phase change
   of pi radians is %0.1f V.",V_pi);
```

Scilab code Exa 11.2 Determination of Corrugation Period and Filter 3dB Bandwidth

```
1 //Example 11.2
2 //Program to determine Corrugation Period and Filter
   's 3dB Bandwidth
3
4 clear all;
5 clc ;
6 close ;
7
8 //Given data
9 L=1*10^-2;           // metres – LENGTH OF THE
   DEVICE
10 Lambda_B=1.52*10^-6; // metres – CENTRE WAVELENGTH
11 Theeta=1;            // Degree – INCIDENT ANGLE
12 n1=3.1;              //REFRACTIVE INDEX of InGaAsP
13
14 // Calculation of Effective Refractive Index of the
   Waveguide
15 ne=n1*sin(2*Theeta*pi/180);
16
17 // Calculation of the Corrugation Period
18 D=(Lambda_B)/(2*ne);
19
```

```

20 // Calculation of the Filter's 3dB Bandwidth
21 delta_Lambda=(D*Lambda_B)/L;
22
23 // Displaying the Results in Command Window
24 printf("\n\n\t Corrugation Period of the First Order
          Grating is %0.1f um.",D/10^-6);
25 printf("\n\n\t Filters 3dB Bandwidth is %0.1f
          Armstrong.",delta_Lambda/10^-10);

```

Scilab code Exa 11.3 Design of a wavelength channel plan for a dense WDM Interleaver Waveband Filter

```

1 //Example 11.3
2 //Program to design a wavelength channel plan for an
   8 band , 32
3 //channel dense WDM Interleaver Waveband Filter .
   Also to determine:
4 //(a)Total No. of channel required for each
      interleaver band filter
5 //(b)The overall bandwidth of the filter in each
      case
6
7 clear all;
8 clc ;
9 close ;
10
11 //Given data
12 number_of_bands=8;
13 M=4;           //TOTAL NUMBER OF CHANNELS IN
                  EACH BAND
14
15 //(a)Total No. of channel required for each
      interleaver band filter
16 //(i)N=0
17 N=0;

```

```

18 Cskip0=(number_of_bands-1)*N;
19 Ctotal0=number_of_bands*M+Cskip0;
20 //Displaying the Result in Command Window
21 printf("\n\n\t(a)(i)For 4-skip-0, Ctotal = %d.", 
    Ctotal0);
22
23 //((ii)N=1
24 N=1;
25 Cskip1=(number_of_bands-1)*N;
26 Ctotal1=number_of_bands*M+Cskip1;
27 //Displaying the Result in Command Window
28 printf("\n\n\t(ii)For 4-skip-1, Ctotal = %d.", 
    Ctotal1);
29
30 //((iii)N=2
31 N=2;
32 Cskip2=(number_of_bands-1)*N;
33 Ctotal2=number_of_bands*M+Cskip2;
34 //Displaying the Result in Command Window
35 printf("\n\n\t(iii)For 4-skip-2, Ctotal = %d.", 
    Ctotal2);
36
37 //Generation of Table 11.1
38 printf("\n\n\t\tTABLE 11.1:WAVELENGTH CHANNEL PLAN"
    );
39 W1=1552.52;           //nm - WAVELENGTH FOR 1 CHANNEL
40 printf("\n\n\t\t(i)4-skip-0");
41 for i = 0:Ctotal0-1
42 printf("\n\tNumber of Channels = %d, Wavelength = 
    %0.2f nm.",i+1,W1+0.8*i);
43 end
44 printf("\n\n\t\t(ii)4-skip-1");
45 for i = 0:Ctotal1-1
46 printf("\n\tNumber of Channels = %d, Wavelength = 
    %0.2f nm.",i+1,W1+0.8*i);
47 end
48 printf("\n\n\t\t(iii)4-skip-2");
49 for i = 0:Ctotal2-1

```

```

50 printf("\n\t Number of Channels = %d, Wavelength =
      %0.2f nm.", i+1, W1+0.8*i);
51 end
52
53 // (b)The overall bandwidth of the filter in each
      case taking values
54 //from Table 11.1
55 // (i)N=0
56 W2=1577.32;           //nm - WAVELENGTH FOR 32
      CHANNELS
57 BW=W2-W1;
58 // Displaying the Result in Command Window
59 printf("\n\n\t (i)For 4-skip-0, Filter
      Bandwidth = %0.1f nm.", BW);
60
61 // (ii)N=1
62 W2=1582.92;           //nm - WAVELENGTH FOR 39
      CHANNELS
63 BW=W2-W1;
64 // Displaying the Result in Command Window
65 printf("\n\n\t (ii)For 4-skip-1, Filter Bandwidth
      = %0.1f nm.", BW);
66
67 // (iii)N=2
68 W2=1588.52;           //nm - WAVELENGTH FOR 46
      CHANNELS
69 BW=W2-W1;
70 // Displaying the Result in Command Window
71 printf("\n\n\t (iii)For 4-skip-2, Filter Bandwidth
      = %0.1f nm.", BW);

```

Chapter 12

OPTICAL FIBER SYSTEMS 1 INTENSITY MODULATION AND DIRECT DETECTION

Scilab code Exa 12.1 Determination of bit rate and duration of a Time slot Frame and Multiframe

```
1 //Example 12.1
2 //Program to determine:
3 // (a) Bit rate for the system
4 // (b) The duration of a time slot
5 // (c) The duration of a frame and multiframe
6
7 clear all;
8 clc ;
9 close ;
10
11 // Given data
12 f=8*10^3;           //Hz - SAMPLING RATE
13 b=8;                //bits - SAMPLE SIZE
14 T=32;               //NUMBER OF TIME SLOTS
15
16 // (a) Bit rate for the system
```

```

17 Number_of_bits=T*b;
18 Bit_rate=f*Number_of_bits
19 // (b) The duration of a time slot
20 Bit_duration=1/Bit_rate;
21 Slot_duration=b*Bit_duration;
22 // (c) The duration of a frame and multiframe
23 Duration_of_frame=T*Slot_duration;
24 Duration_of_multiframe=T/2*Duration_of_frame;
25
26 // Displaying The Results in Command Window
27 printf("\n\n\t (a) Bit rate for the system is %0.3f
           Mbit/s.",Bit_rate/10^6);
28 printf("\n\n\t (b) The duration of a time slot is %0
           .1f us.",Slot_duration/10^(-6));
29 printf("\n\n\t (c) The duration of a frame is %1.0f
           us and multiframe is %1.0f ms.",Duration_of_frame
           /10^(-6),Duration_of_multiframe/10^(-3));

```

Scilab code Exa 12.2 Determination of required electrical and optical SNR

```

1 //Example 12.2
2 //Program to determine the required electrical and
   optical SNR
3
4 clear all;
5 clc ;
6 close ;
7
8 //Given data
9 BER=10^(-9);                                //BIT ERROR RATE
10
11 //Optical SNR
12 SNR_op=(erfinv(1-2*BER))*2*sqrt(2); //erfc(x)=1-erf(
   x)
13

```

```

14 // Electrical SNR
15 SNR_el=((erfinv(1-2*BER))*2*sqrt(2))^2; // erfc(x)=1-
    erf(x)
16
17 // Displaying the Results in Command Window
18 printf("\n\n\t Optical SNR is %1.0f or %0.1f dB.", ,
    SNR_op ,10*log10(SNR_op));
19 printf("\n\n\t Electrical SNR is %1.0f or %0.1f dB.
    ",SNR_el ,10*log10(SNR_el));

```

Scilab code Exa 12.3 Estimation of the average number of photons which must be incident on the APD to register a binary one

```

1 //Example 12.3
2 //Program to estimate the average number of photons
   which must be
3 //incident on the APD to register a binary one with
   a BER of 10^(-9)
4
5 clear all;
6 clc ;
7 close ;
8
9 //Given data
10 k=0.02;           //CARRIER IONIZATION RATE
11 M=100;            //MULTIPLICATION FACTOR
12 SNR=144;          //SIGNAL TO NOISE RATIO
13 Bt=0.6;           //FOR RAISED COSINE PULSE
   SPECTRUM
14 n=0.8;            //(*100) percent - QUANTUM
   EFFICIENCY
15
16 //Excess avalanche noise factor F(M)
17 F=k*M+(2-1/M)*(1-k);
18

```

```

19 // Average number of photons
20 z=2*Bt*ceil(F)/n*SNR;
21
22 // Displaying the Result in Command Window
23 printf("\n\n\t The average number of photons which
           must be incident on the APD is %1.0f photons.",z)
;
```

Scilab code Exa 12.4 Estimation of incident optical power to register binary 1 at bit rates of 10 Mbps and 140 Mbps

```

1 //Example 12.4
2 //Program to estimate incident optical power to
   register binary 1
3 //at bit rates of 10 Mbit/s and 140 Mbit/s
4
5 clear all;
6 clc ;
7 close ;
8
9 //Given data
10 BER=10^(-9);                                //BIT ERROR RATE
11 e=1.602*10^(-19);                           //Coulombs – CHARGE
      OF AN ELECTRON
12 Lambda=1*10^(-6);                          // metre –
      WAVELENGTH
13 h= 6.626*10^(-34);                         // J/K – PLANK' s
      CONSTANT
14 c=2.998*10^8;                             //m/s – VELOCITY OF
      LIGHT IN VACCUM
15 zm=864;                                    // photons – FROM
      EXAMPLE 12.3
16
17 //For 10 Mbit/s
18 Bt=10*10^6;                                 // bps – BIT RATES
```

```

19 Po=zm*h*c*Bt/(2*Lambda);
20 //Displaying the Result in Command Window
21 printf("\n\n\t Incident optical power for %1.0f
Mbit/s is %0.1f pW or %0.1f dBm.",Bt/10^6,Po
/10^(-12),10*log10(Po/10^(-3)));
22
23 //For 140 Mbit/s
24 Bt=140*10^6; //bps - BIT RATES
25 Po=zm*h*c*Bt/(2*Lambda);
26 //Displaying the Result in Command Window
27 printf("\n\n\t Incident optical power for %1.0f
Mbit/s is %0.3f nW or %0.1f dBm.",Bt/10^6,Po
/10^(-9),10*log10(Po/10^(-3)));

```

Scilab code Exa 12.5 Determination of the total channel loss ignoring dispersion

```

1 //Example 12.5
2 //Program to determine the total channel loss
   ignoring dispersion
3
4 clear all;
5 clc ;
6 close ;
7
8 //Given data
9 alpha_fc=5; //dB/km - FIBER CABLE
   ATTENUATION
10 alpha_j=2; //dB/km - SPLICE LOSS
11 alpha_s=3.5; //dB - SOURCE CONNECTOR
   LOSS
12 alpha_d=2.5; //dB - DETECTOR CONNECTOR
   LOSS
13 L=4; //km - LENGTH OF OPTICAL
   FIBER LINK

```

```

14
15 //Total channel loss
16 alpha_cr=alpha_s+alpha_d
17 C_L=(alpha_fc+alpha_j)*L+alpha_cr;
18
19 //Displaying The Result in Command Window
20 printf("\n\n\tTotal channel loss , C_L = %1.0f dB" ,
C_L)

```

Scilab code Exa 12.6 Estimation of the dispersion equalization penalty for bit given rates

```

1 //Example 12.6
2 //Program to estimate the dispersion-equalization
   penalty for bit
3 //rates:
4 //(a)25 Mbit/s
5 //(b)150 Mbit/s
6
7 clear all;
8 clc ;
9 close ;
10
11 //Given data
12 L=8;                      //km - LENGTH OF FIBER LINK
13 sigma=0.6*10^(-9);        //s/km - RMS PULSE
   BROADENING
14
15
16 //(a)For 25 Mbit/s
17 Bt=25*10^6;                //bit/sec - BIT RATE
18 //Without mode coupling
19 sigma_T=sigma*L;
20 D_L=2*(2*sigma_T*Bt*sqrt(2))^4;
21 printf("\n\n\t(a)For Bt = %1.0f Mbit/s , Without

```

```

        mode coupling , D_L = %0.2f dB",Bt/10^6,D_L);
22 //With mode coupling
23 sigma_T=sigma*sqrt(L);
24 D_L=2*(2*sigma_T*Bt*sqrt(2))^4;
25 printf("\n\n\tFor Bt = %1.0f Mbit/s, With mode
coupling , D_L = %0.2f X 10^(-4) dB",Bt/10^6,D_L
/10^(-4));
26
27 // (b) 150 Mbit/s
28 Bt=150*10^6; //bit/sec - BIT RATE
29 //Without mode coupling
30 sigma_T=sigma*L;
31 D_L=2*(2*sigma_T*Bt*sqrt(2))^4;
32 printf("\n\n\t(b) For Bt = %1.0f Mbit/s, Without
mode coupling , D_L = %0.2f dB",Bt/10^6,D_L);
33 //With mode coupling
34 sigma_T=sigma*sqrt(L);
35 D_L=2*(2*sigma_T*Bt*sqrt(2))^4;
36 printf("\n\n\tFor Bt = %1.0f Mbit/s, With mode
coupling , D_L = %0.2f dB",Bt/10^6,D_L);

```

Scilab code Exa 12.7 Estimation of the maximum bit rate that may be achieved on the link when using NRZ format

```

1 //Example 12.7
2 //Program to estimate the maximum bit rate that may
be achieved on
3 //the link when using NRZ format
4
5 clear all;
6 clc ;
7 close ;
8
9 //Given data
10 L=8; //km - LENGTH OF

```

```

        FIBER LINK
11 Ts=8*10^(-9);                                // s - SOURCE RISE
      TIME
12 Dn=5*10^(-9);                                // s/km - INTERMODAL
      RISE TIME
13 Dc=1*10^(-9);                                // s/km - INTRAMODAL
      RISE TIME
14 Td=6*10^(-9);                                // s - DETECTOR RISE
      TIME
15 Tn=Dn*L;
16 Tc=Dc*L;
17
18 // Total Rise Time
19 Tsyst=1.1*sqrt(Ts^2+Tn^2+Tc^2+Td^2);
20
21 //Maximum bit rate
22 Bt= 0.7/Tsyst;
23
24 // Displaying the Result in Command Window
25 printf("\n\n\t Maximum bit rate , Bt(max) is %0.1f
      Mbit/s which for NRZ is equivalent to a 3 dB
      optical bandwidth of %0.1f Mbit/s .",Bt/10^6,Bt
      /10^6/2);

```

Scilab code Exa 12.8 Estimation of maximum possible link length without repeaters when operating at 35 Mbps and 400 Mbps

```

1 //Example 12.8
2 //Program to estimate:
3 // (a)Maximum possible link length without repeaters
   when operating at 35 Mbit/s
4 // (b)Maximum possible link length without repeaters
   when operating at 400 Mbit/s
5 // (c)Reduction in maximum possible link length
   considering dispersion-equalization penalty

```

```

6
7 clear all;
8 clc ;
9 close ;
10
11 // Given data
12 Pi=-3;                                //dBm - POWER LAUNCHED
13 alpha_fc=0.4;                          //dB/km - CABLE FIBER LOSS
14 alpha_j=0.1;                           //dB/km - SPLICE LOSS
15 alpha_cr=2;                            //dB - TOTAL CONNECTOR
   LOSS
16 Ma=7;                                 //dB - REQUIRED SAFETY
   MARGIN
17 D1=1.5;                               //dB - DISPERSION-
   EQUALIZATION PENALTY
18
19 // (a) Maximum possible link length without repeaters
   when operating at 35 Mbit/s
20 Po=-55;                                //dBm - REQUIRED POWER BY
   APD
21 // Optical budget:  $Pi - Po = (\alpha_{fc} + \alpha_j)L + \alpha_{cr} + Ma$ 
22 L1=(Pi-Po-alpha_cr-Ma)/(alpha_fc+alpha_j);
23 printf("\n\n\t (a) Maximum possible link length
   without repeaters when operating at 35 Mbit/s is
   %1.0f km.",L1);
24
25 // (b) Maximum possible link length without repeaters
   when operating at 400 Mbit/s
26 Po=-44;                                //dBm - REQUIRED POWER BY
   APD
27 // Optical budget:  $Pi - Po = (\alpha_{fc} + \alpha_j)L + \alpha_{cr} + Ma$ 
28 L2=(Pi-Po-alpha_cr-Ma)/(alpha_fc+alpha_j);
29 printf("\n\n\t (b) Maximum possible link length
   without repeaters when operating at 400 Mbit/s is
   %1.0f km.",L2);
30

```

```

31 // (c) Reduction in maximum possible link length
   considering dispersion-equalization penalty
32 //Optical budget considering dispersion-equalization
   penalty:
33 //Pi-Po=(alpha_fc+alpha_j)L+alpha_cr+Ma
34 L3=(Pi-Po-alpha_cr-Dl-Ma)/(alpha_fc+alpha_j);
35 printf("\n\n\t(c) Reduction in maximum possible link
   length considering dispersion-equalization
   penalty is %1.0f km.",L2-L3);

```

Scilab code Exa 12.9 Determination of the viability of optical power budget

```

1 //Example 12.9
2 //Program to determine the viability of optical
   power budget
3
4 clear all;
5 clc ;
6 close ;
7
8 //Given data
9 L=7;                                //km – OPTICAL FIBER LINK
10 alpha_fc=2.6;                         //dB/km – CABLE FIBER LOSS
11 alpha_j=0.5;                           //dB/km – SPLICE LOSS
12 alpha_cr=1.5;                          //dB – TOTAL CONNECTOR
   LOSS
13 Ma=6;                                 //dB – REQUIRED SAFETY
   MARGIN
14 Pr_dBm=-41;                            //dBm – RECEIVER
   SENSITIVITY
15 Pi=100*10^(-6);                      //Watt – POWER LAUNCHED
16 Pi_dBm=10*log10(Pi/10^(-3));
17

```

```

18 //Total System Margin
19 Total_system_margin=Pi_dBm-Pr_dBm;
20 printf("\n\n\t Total System Margin is %0.1f dB.", 
    Total_system_margin);
21
22 //Total System Loss
23 Total_system_loss=L*alpha_fc+(L-1)*alpha_j+alpha_cr+
    Ma;
24 printf("\n\n\t Total System Loss is %0.1f dB.", 
    Total_system_loss);
25
26 //Excess Power margin
27 Excess_power_margin=Total_system_margin-
    Total_system_loss;
28 printf("\n\n\t Excess Power margin is %0.1f dB.", 
    Excess_power_margin);
29
30 //Testing Viability
31 if Excess_power_margin >=0 then
32 printf("\n\n\t The system is viable.");
33 else
34 printf("\n\n\t The system is not viable.");
35 end

```

Scilab code Exa 12.10 Estimation of ratio of SNR of the coaxial system to the SNR of the fiber system

```

1 //Example 12.10
2 //Program to estimate ratio of SNR of the coaxial
   system to the SNR
3 //of the fiber system
4
5 clear all;
6 clc ;
7 close ;

```

```

8
9 // Given data
10 V=5;                                // volts - TRANSMITTER PEAK
11 Zo=100;                               // ohms - CABLE IMPEDANCE
12 T=290;                                // Kelvin - OPERATING
13 lambda=0.85*10^(-6);                  // metre - WAVELENGTH
14 K=1.38*10^(-23);                     // J/K - BOLTZMANN's CONSTANT
15 n=0.7;                                 // (*100) percent - QUANTUM
16 Pi=1*10^(-3);                         // Watts - OPTICAL POWER
17 h=6.626*10^(-34);                    // (m^2)Kg/s - PLANK's CONSTANT
18 c=2.998*10^8;                        // m/s - SPEED OF LIGHT
19
20 // Ratio SNR(coax)/SNR(fiber)
21 Ratio=V^2*h*c/(2*K*T*Zo*n*Pi*lambda);
22
23 // Displaying the Result in Command Window
24 printf("\n\n\t SNR(coax)/SNR(fiber) = %d dB.", 10*
         log10(Ratio));

```

Scilab code Exa 12.11 Determination of the average incident optical power required at the receiver

```

1 //Example 12.11
2 //Program to determine the average incident optical
   power required at
3 //the receiver
4
5 clear all;
6 clc ;
7 close ;
8
9 // Given data

```

```

10 k=1.38*10^(-23); // J/K – BOLTZMANN' s
    CONSTANT
11 e=1.602*10^(-19); // Coulombs – CHARGE OF AN
    ELECTRON
12 SNR_dB=55; //dB – SIGNAL POWER TO RMS
    NOISE RATIO
13 ma=0.8; //MODULATION INDEX
14 Id=0; //A – DARK CURRENT
15 T=293; //K – OPERATING TEMPERATURE
16 B=5*10^6; //Hz – BANDWIDTH
17 Fn_dB=1.5; //dB – NOISE FIGURE
18 Rl=1*10^6; //Ohms – EFFECTIVE INPUT
    IMPEDANCE
19 R=0.5; //A/W – RESPONSIVITIY
20 b=0.7; //RATIO OF LUMINANCE TO
    COMPOSITE VIDEO
21 SNR=10^(SNR_dB/10);
22 Fn=10^(Fn_dB/10);
23
24 //Photo-current , Ip=R*Po Ip=Po*R;
25 // (SNR)p-p=(2*ma*Ip*b)^2/(2*e*B*(Ip+Id)+(4*k*T*B*Fn/
    Rl));
26 // Rearranging and solving the quadratic equation ,
    Incident Power
27 Po=((SNR*2*e*B*R)+sqrt((SNR*2*e*B*R)^2-4*(2*ma*R*b)
    ^2*(SNR*(-4*k*T*B*Fn/Rl))))/(2*(2*ma*R*b)^2);
28
29 // Displaying the Result in Command Window
30 printf("\n\n\t The average incident optical power
    required at the receiver is %0.2f uW or %0.1f dBm
    ." ,Po/10^(-6) ,10*log10(Po/10^(-3)));

```

Scilab code Exa 12.12 Determination of the average incident optical power required to maintain given SNR

```

1 //Example 12.12
2 //Program to determine the average incident optical
   power required to
3 //maintain given SNR
4
5 clear all;
6 clc ;
7 close ;
8
9 //Given data
10 Lambda=1*10^(-6);                                // metre -
11 h= 6.626*10^(-34);                               // J/K - PLANK' s
   CONSTANT
12 c=2.998*10^8;                                    //m/s - VELOCITY OF
   LIGHT IN VACCUM
13 k=1.38*10^(-23);                                // J/K - BOLTZMANN' s
   CONSTANT
14 e=1.602*10^(-19);                               // Coulombs - CHARGE
   OF AN ELECTRON
15 eeta=0.6;                                         // *100 percent -
   QUANTUM EFFICIENCY
16 SNR_dB=45;                                         //dB - CURRENT SNR
17 Rl=50*10^3;                                       //Ohms - EFFECTIVE
   LOAD IMPEDANCE
18 T=300;                                            //K - OPERATING
   TEMPERATURE
19 ma=0.5;                                           //MODULATION INDEX
20 Fn_dB=6;                                           //dB - NOISE FIGURE
21 B=10*10^6;                                         //Hz - POST
   DETECTION BANDWIDTH
22
23 SNR=10^(SNR_dB/10);
24 Fn=10^(Fn_dB/10);
25
26 //Average incident optical power required to
   maintain given SNR
27 Po=h*c/(e*eeta*ma^2*Lambda)*sqrt(8*k*T*Fn/Rl)*sqrt(

```

```

        SNR*B);
28
29 // Displaying the Result in Command Window
30 printf("\n\n\t The average incident optical power
           required at the receiver is %0.2f uW or %0.1f dBm
           ." ,Po/10^(-6) ,10*log10(Po/10^(-3)));

```

Scilab code Exa 12.13 Determination of the viability of optical power budget and estimation of any possible increase in link length

```

1 //Example 12.13
2 //Program to:
3 // (a) Determine the viability of optical power budget
4 // (b) Estimate any possible increase in link length
5
6 clear all;
7 clc ;
8 close ;
9
10 // Given data
11 L=2;                                //km - OPTICAL FIBER LINK
12 alpha_fc=3.5;                         //dB/km - CABLE FIBER LOSS
13 alpha_j=0.7;                           //dB/km - SPLICE LOSS
14 alpha_cr=1.6;                          //dB - CONNECTOR LOSS AT
                                           RECEIVER
15 Ma=4;                                 //dB - REQUIRED SAFETY
                                           MARGIN
16 Pr_dBm=-25;                           //dBm - RECEIVER
                                           SENSITIVITY
17 Pi_dBm=-10;                            //dBm - POWER LAUNCHED
18
19 // Total System Margin
20 Total_system_margin=Pi_dBm-Pr_dBm;
21 printf("\n\n\t (a) Total System Margin is %0.1f dB." ,

```

```

        Total_system_margin);

22
23 //Total System Loss
24 Total_system_loss=L*alpha_fc+L*alpha_j+alpha_cr+Ma;
25 printf("\n\n\t Total System Loss is %0.1f dB.", 
        Total_system_loss);
26
27 //Excess Power margin
28 Excess_power_margin=Total_system_margin-
        Total_system_loss;
29 printf("\n\n\t Excess Power margin is %0.1f dB.", 
        Excess_power_margin);
30
31 // (a) Testing Viability
32 if Excess_power_margin >=0 then
33 printf("\n\n\t The system is viable.");
34 else
35 printf("\n\n\t The system is not viable.");
36 end
37
38 // (b) Maximum possible link length
39 Pi=0;                                //dBm - LAUNCHED POWER
40 Po=-25;                               //dBm - REQUIRED POWER BY
        APD
41 Ma=7;                                 //dB - SAFETY MARGIN
42 //Optical budget: Pi-Po=(alpha_fc+alpha_j)L+alpha_cr
        +Ma
43 L1=(Pi-Po-alpha_cr-Ma)/(alpha_fc+alpha_j);
44 printf("\n\n\t (b)Maximum possible increase in link
        length is %0.1f km.",L1-L);

```

Scilab code Exa 12.14 Determination of whether the combination of components gives an adequate temporal response

```
1 //Example 12.14
```

```

2 //Program to determine whether the combination of
   components gives
3 //an adequate temporal response
4
5 clear all;
6 clc ;
7 close ;
8
9 //Given data
10 L=5;                                     //km - LENGTH OF
                                             FIBER LINK
11 Ts=10*10^(-9);                         //s - SOURCE RISE
                                             TIME
12 Dn=9*10^(-9);                          //s/km - INTERMODAL
                                             RISE TIME
13 Dc=2*10^(-9);                          //s/km - CHROMATIC
                                             RISE TIME
14 Td=3*10^(-9);                           //s - DETECTOR RISE
                                             TIME
15 Bopt=6*10^6;                            //Hz - REQUIRED
                                             OPTICAL BANDWIDTH
16
17 Tn=Dn*L;
18 Tc=Dc*L;
19
20 //Maximum permitted rise time
21 Tsyst_max=0.35/Bopt;
22
23 //Total system rise time
24 Tsyst=1.1*sqrt(Ts^2+Tn^2+Tc^2+Td^2);
25
26 //Displaying the Results in Command Window
27 printf("\n\n\t Maximum permitted rise time , Tsyst(
   max) = %0.1f ns.",Tsyst_max/10^(-9));
28 printf("\n\n\t Total system rise time , Tsyst = %0.1f
   ns.",Tsyst/10^(-9));
29 printf("\n\n\t Hence system gives adequate temporal
   response .");

```

Scilab code Exa 12.15 Derivation of an expression for the improvement in post detection SNR and determination of the improvement in post detection SNR and Bandwidth

```
1 //Example 12.15
2 //Note: MAXIMA SCILAB TOOLBOX REQUIRED FOR THIS
   PROGRAM
3 //Program to:
4 // (a)Derive an expression for the improvement in
   post detection SNR
5 // (b)Determine the improvement in post detection SNR
   and Bandwidth
6
7 clear all;
8 clc ;
9 close ;
10
11 // (a)Derive an expression for the improvement in
   post detection SNR
12 //Symbolic Representation
13 syms Pa R Po Ba No Df
14 //D-IM OUTPUT SNR
15 SNR_DIM=(R*Po)^2*Pa/(2*Ba*No);
16 //FM OUTPUT SNR
17 SNR_FM=3*Df^2*(R*Po)^2*Pa/(4*Ba*No);
18 //SNR IMPROVEMENT
19 SNR_imp=SNR_FM/SNR_DIM;
20 //SNR IMPROVEMENT IN dB
21 SNR_imp_dB=10*log10(SNR_imp);
22 disp(SNR_imp,"SNR IMPROVEMENT = ");
23 disp(SNR_imp_dB,"SNR IMPROVEMENT IN dB = ");
24 printf("\n\n\t The above expression is equivalent to
   1.76+20*log10(Df));
```

25

```

26 // (b) Determine the improvement in post detection SNR
      and Bandwidth
27 // Given data
28 fd1=400*10^3;                      //Hz – PEAK FREQUENCY
      DEVIATION
29 Ba1=4*10^3;                        //Hz– BANDWIDTH
30 // Frequency Deviation Ratio
31 Df1=fd1/Ba1;
32 //SNR Improvement expression from part(a)
33 SNR_imp_dB1=1.76+20*log10(Df1);
34 //Bandwidth
35 Bm=2*(Df1+1)*Ba1;
36 printf("\n\n\t The SNR Improvement = %0.2f dB." ,
      SNR_imp_dB1);
37 printf("\n\n\t The Bandwidth of FM-IM, Bm = %1.0f
      kHz.",Bm/10^3);

```

Scilab code Exa 12.16 Program to determine the ratio of SNRs of FM IM and PM IM systems

```

1 //Example 12.16
2 //Note: MAXIMA SCILAB TOOLBOX REQUIRED FOR THIS
      PROGRAM
3 //Program to determine the ratio of SNRs of FM-IM
      and PM-IM systems
4
5 clear all;
6 clc ;
7 close ;
8
9 //Symbolic representation
10 syms fd Pa R Po Ac Ba No
11
12 //FOR FM-IM
13 Df=fd/Ba;    //Frequency Deviation

```

```

14 SNR_FM=3*Df^2*Pa*(R*Po)^2*Ac^2/2/(2*Ba*No);
15
16 //FOR PM-IM
17 Dp=fd/Ba; //Frequency Deviation
18 SNR_PM=Df^2*Pa*(R*Po)^2*Ac^2/2/(2*Ba*No);
19
20 //Determining Ratio
21 Ratio=SNR_FM/SNR_PM;
22
23 //Displaying the Result in Command Window
24 disp(Ratio," SNR_FM/SNR_PM = ");

```

Scilab code Exa 12.17 Calculation of the optimum receiver bandwidth and the peak to peak signal power to rms noise ratio

```

1 //Example 12.17
2 //Program to calculate:
3 // (a)The optimum receiver bandwidth
4 // (b)The peak to peak signal power to rms noise
      ratio
5
6 clear all;
7 clc ;
8 close ;
9
10 //Given data
11 Tr=12*10^(-9); //s - SYSTEM RISE TIME
12 fo=20*10^6; //Hz - NOMINAL PULSE
      RATE
13 fd=5*10^6; //Hz - PEAK TO PEAK
      FREQUECY DEVIATION
14 M=60; //APD MULTIPLICATION
      FACTOR
15 R=0.7; //APD RESPONSIVITY
16 B=6*10^6; //Hz - BASEBAND NOISE

```

```

        BANDWIDTH
17 Ppo=10^(-7);           //Watt – PEAK OPTICAL
    POWER
18 in_sq_bar=10^(-17);    //A^2 – RECEIVER MEAN
    SQUARE NOISE CURRENT
19
20 // (a)The optimum receiver bandwidth
21 Bopt=1/Tr;
22 To=1/fo;
23
24 // (b)The peak to peak signal power to rms noise
    ratio
25 SNR=3*(To*fd*M*R*Ppo)^2/((2*pi*Tr*B)^2*in_sq_bar);
26
27 // Displaying the Results in Command Window
28 printf("\n\n\t (a)The optimum receiver bandwidth is
    %0.1f MHz.",Bopt/10^6);
29 printf("\n\n\t (b)The peak to peak signal power to
    rms noise ratio is %0.1f dB.",10*log10(SNR));

```

Scilab code Exa 12.18 Formation of comparision showing total channel loss against number of nodes for Bus and Star Distribution Systems

```

1 //Example 12.18
2 //Program to form comparision showing total channel
    loss against
3 //number of nodes for:
4 // (i) Bus Distribution System
5 // (ii) Star Distribution System
6
7 clear all;
8 clc ;
9 close ;

```

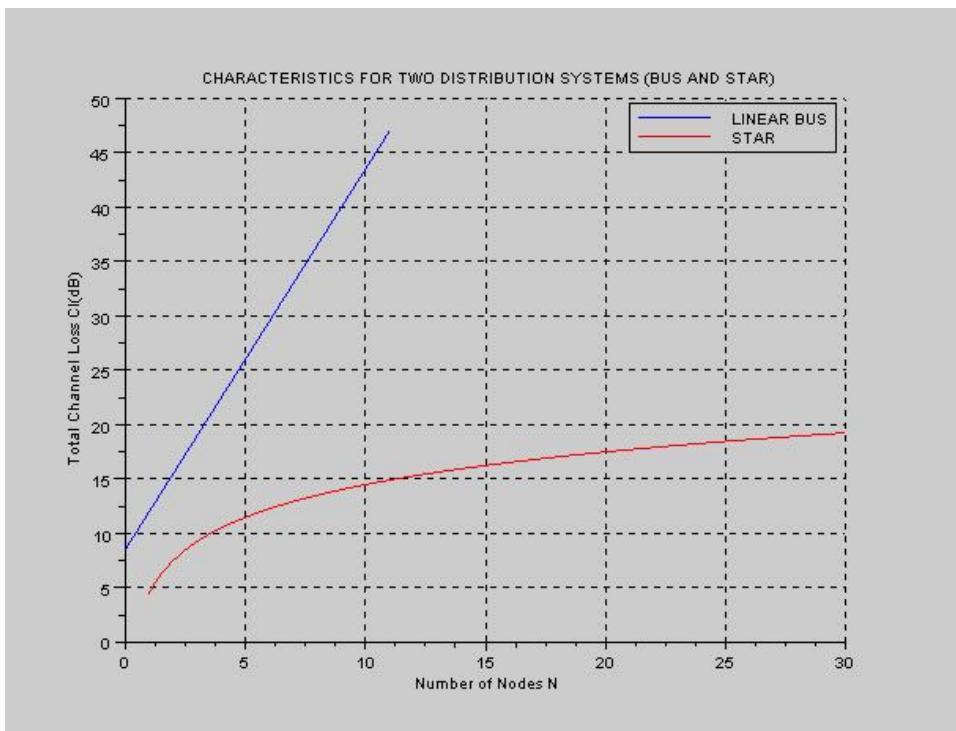


Figure 12.1: Formation of comparision showing total channel loss against number of nodes for Bus and Star Distribution Systems

```

10
11 // Given data
12 alpha_cr=1; //dB - CONNECTOR LOSS
13 alpha_fc=5; //dB/km - FIBER CABLE LOSS
14 L_bu=0.1 //m - FIBER LENGTH
15 L_tr=10; //dB - ACCESS COUPLER TAP RATIO
16 L_sp=3; //dB - SPLITTER LOSS
17 L_ac=1; //dB - ACCESS COUPLER INSERTION LOSS
18 L_st=0.1; //m - TOTAL FIBER LENGTH IN STAR ARMS
19 L_ex=0; //dB - STAR COUPLER EXCESS LOSS
20
21 //Bus Distribution System
22 N=0:0.01:11;
23 Cl_bus=2*alpha_cr+(N-1)*alpha_fc*L_bu+(2*alpha_cr+
    L_ac)*(N-3)+(2*alpha_cr+L_tr)+L_sp+alpha_cr;
24 Hm=abs(Cl_bus);
25 figure;
26 plot2d(N,Hm,2);
27
28 //Star Distribution System
29 N=1:0.01:30;
30 Cl_star=4*alpha_cr+alpha_fc*L_st+10*log10(N)+L_ex;
31 Hm=abs(Cl_star);
32 plot2d(N,Hm,5);
33 xlabel('Number of Nodes N');
34 ylabel('Total Channel Loss Cl(dB)');
35 title('CHARACTERISTICS FOR TWO DISTRIBUTION SYSTEMS
        (BUS AND STAR)');
36 xgrid (1);
37 h=legend(['LINEAR BUS'; 'STAR']);

```

Scilab code Exa 12.19 Estimation of the maximum system length for satisfactory performance

```
1 //Example 12.19
2 //Program to estimate the maximum system length for
   satisfactory
3 // performance
4
5 clear all;
6 clc ;
7 close ;
8
9 // Given data
10 SNR_dB=17;                                //dB – REQUIRED SNR
11 L=100*10^3;                               //metre – INTERVAL SPACING
12 K=4;                                     //FOR AMPLIFIER
13 h= 6.626*10^(-34);                      //J/K – PLANK's CONSTANT
14 c=2.998*10^8;                            //m/s – VELOCITY OF LIGHT IN
   VACCUM
15 B=1.2*10^(9);                           //bit/s – TRANSMISSION RATE
16 Pi_dBm=0;                                 //dBm – INPUT POWER
17 Lambda=1.55*10^(-6);                     //metre – OPERATING
   WAVELENGTH
18 alpha_fc=0.22;                            //dB/km – FIBER CABLE
   ATTENUATION
19 alpha_j=0.03;                             //dB/km – SPLICE LOSS
20
21 // Calculation of SNR and Pi
22 SNR=10^(SNR_dB/10);
23 Pi=10^(Pi_dBm/10)*10^(-3);
24
25 //Maximum system length
26 Lto=(Pi*Lambda*10^(-(alpha_fc+alpha_j)*L/10/10^3)/(K
   *h*c*B))/SNR*L;
```

```
27
28 //Displaying the Result in Command Window
29 printf("\n\n\t Maximum system length for
           satisfactory performance is %1.0f X 10^4 km.",Lto
           /10^7);
```

Scilab code Exa 12.20 Obtain an expression for the total noise figure for the system

```
1 //Example 12.20
2 //Note: MAXIMA SCILAB TOOLBOX REQUIRED FOR THIS
      PROGRAM
3 //Program to obtain an expression for the total
      noise figure for the
4 //system
5
6 clear all;
7 clc ;
8 close ;
9
10 //Symbolic representation
11 syms F G k M;
12
13 //Given data
14 //F_to = F1*G1 + F2*G2 + F3*G3 +.....+ FM*GM
15 //For Identical Repeaters :
16 //F1*G1 = F2*G2 = F3*G3 =.....= FM*GM = F*G(say)
17 x=F*G;
18 F_to = symsum(x,k,1,M);
19
20 //Displaying The Results in Command Window
21 disp (F_to,"TOTAL NOISE FIGURE: F_to = ");
22 disp ("At the output from the first amplifier
           repeater , a degradation in SNR of F*G occurs
           followed by a decrease of 1/M");
```

Scilab code Exa 12.21 Calculation of second order dispersion coefficient for L1 and dispersion slope for L2

```
1 //Example 12.21
2 //Program to :
3 // (a) Calculate second order dispersion coefficient
   for L1
4 // (b) Determine the dispersion slope for L2
5 // (c) Verify that periodic dispersion management map
   will provide
6 // sufficient coincidence to facilitate reliable DWDM
   transmission
7
8 clear all;
9 clc ;
10 close ;
11
12 // Given data
13 L1=160;           //km – PATH LENGTH
14 L2=20;            //km – PATH LENGTH
15
16 // (a) To calculate second order dispersion
   coefficient for L1
17 Beeta22=17;        //ps/nm/km – 2nd ORDER
   DISPERSION COEFF. FOR L2
18 Beeta21=-Beeta22*L2/L1;
19 printf("\n\n\t(a)The second order dispersion
   coefficient for L1 is %0.3f ps/nm/km",Beeta21);
20
21 // (b) To determine the dispersion slope for L2
22 S1=0.075;          //ps/nm^2/km – DISPERSION SLOPE
   FOR L1
23 S2=-S1*L1/L2;
24 printf("\n\n\t(b)The dispersion slope for L2 is %0.1
```

```

f ps/nm^2/km" ,S2) ;
25
26 // (c)To verify that periodic dispersion management
   map will provide
27 // sufficient coincidence to facilitate reliable DWDM
   transmission
28 OP=S1*(L1/L2)+S1*(Beeta22/Beeta21);
29 if OP==0 then
30 printf("\n\n\t(c) Periodic dispersion management map
   will provide sufficient coincidence to facilitate
   reliable DWDM transmission as S1(L1/L2)+S1(
   Beeta22/Beeta21)=0");
31 else
32 printf("\n\n\t(c) Periodic dispersion management map
   will not provide sufficient coincidence to
   facilitate reliable DWDM transmission as S1(L1/L2
   )+S1(Beeta22/Beeta21)!=0");
33 end

```

Scilab code Exa 12.22 Determination of the separation for the soliton pulses to avoid interaction and the transmission bit rate

```

1 //Example 12.22
2 //Program to determine
3 // (a)The separation for the soliton pulses to avoid
   interaction
4 // (b)The transmission bit rate of the optical
   soliton communication
5 //system
6
7 clear all;
8 clc ;
9 close ;
10
11 // Given data

```

```

12 To=70*10^(-12); // s - BIT
    PERIOD
13 tau=6*10^(-12); // s - PULSE
    WIDTH
14 Beeta2=-0.5*10^(-12)*10^(-12)*10^(-3); // s^2/km - 2nd
    ORDER DISPERSION
15 // COEFFICIENT
16 La=50*10^3; //AMPLIFIER
    SPACING
17
18 // (a)The separation for the soliton pulses to avoid
    interaction
19 qo=1/2*(To/tau);
20 // (b)The transmission bit rate of the optical
    soliton comm. system
21 Bt=1/(2*qo)*1/sqrt(abs(Beeta2)*La);
22
23 // Displaying the Results in Command Window
24 printf("\n\n\t(a)The separation for the soliton
    pulses to avoid interaction is %0.1f .",qo);
25 printf("\n\n\t(b)The maximum bit rate of the optical
    soliton communication system is much less than
    %0.2f Gbit/s .",Bt/10^9);

```

Scilab code Exa 12.23 Determination of the maximum transmission bit rate for the system

```

1 //Example 12.23
2 //Program to determine the maximum transmission bit
    rate for the
3 //system
4
5 clear all;
6 clc ;

```

```

7 close ;
8
9 //Given data
10 To=40*10^(-12); //s - BIT
    PERIOD
11 tau=4*10^(-12); //s - PULSE
    WIDTH
12 Beeta2=-1.25*10^(-12)*10^(-12)*10^(-3); //s^2/km - 2
    nd ORDER
13 //DISPERSION
    COEFFICIENT

14 alpha=0.2*10^(-3); //dB/m -
    ATTENUATION CONSTANT
15
16 //The separation for the soliton pulses to avoid
    interaction
17 qo=1/2*(To/tau);
18
19 //Maximum transmission bit rate for the system
20 Bt=1/(2*qo)*sqrt(alpha/abs(Beeta2));
21
22 //Displaying the Result in Command Window
23 printf("\n\n\t The maximum bit rate of the
    ultrashort pulse optical soliton system is
    significantly greater than %1.0f Gbit/s .",Bt
    /10^9);

```

Chapter 13

OPTICAL FIBER SYSTEMS 2 COHERENT AND PHASE MODULATED

Scilab code Exa 13.1 Estimation of the maximum temperature change that could be allowed for the local oscillator laser

```
1 //Example 13.1
2 //Program to estimate the maximum temperature change
   that could
3 //be allowed for the local oscillator laser
4
5 clear all;
6 clc ;
7 close ;
8
9 //Given data
10 IF=1.5*10^6;           //Hz - NOMINAL IF
11 del_f=19*10^6;         //Hz/C - OUTPUT FREQUENCY
   CHANGE
12
13 //Maximum temperature change that could be allowed
14 f=0.1*IF;
```

```

15 Max_temp_change=f/del_f;
16
17 //Displaying the Result in Command Window
18 printf("\n\n\t Maximum temperature change that could
    be allowed for the local oscillator laser is %0
    .3f C .",Max_temp_change);

```

Scilab code Exa 13.2 Determination of the operating bandwidth of the receiver

```

1 //Example 13.2
2 //Program to determine the operating bandwidth of
   the receiver
3
4 clear all;
5 clc ;
6 close ;
7
8 //Given data
9 SNL=-85.45;           //dBm – SHOT NOISE LIMIT
10 eeta=0.86;            /*100 percent – EFFICIENCY FOR
   IDEAL RECEIVER
11 Lambda=1.54*10^(-6); //metre – OPERATING WAVELENGTH
12 SNR=12;                //dB – SIGNAL TO NOISE RATIO
13 h= 6.626*10^(-34);   //J/K – PLANK's CONSTANT
14 c=2.998*10^8;         //m/s – VELOCITY OF LIGHT IN
   VACCUM
15
16 //Incoming Signal Power
17 Ps=10^(SNL/10);
18
19 //Operating bandwidth of the receiver
20 B=eeta*Ps*Lambda/(h*c*10^(SNR/10));
21
22 //Displaying the Result in Command Window

```

```
23 printf("\n\n\t Operating bandwidth of the receiver ,  
B = %0.1f GHz.", B/10^9);
```

Scilab code Exa 13.3 Calculation of the number of received photons per bit for different detection schemes

```
1 //Example 13.3  
2 //Program to calculate the number of received  
   photons per bit for:  
3 // (a)ASK heterodyne synchronous detection  
4 // (b)ASK heterodyne asynchronous detection  
5 // (c)PSK homodyne detection  
6  
7 clear all;  
8 clc ;  
9 close ;  
10  
11 // Given data  
12 eeta=1;           /*100 percent - EFFICIENCY FOR  
   IDEAL RECEIVER  
13 BER=10^(-9);      //BIT ERROR RATE  
14  
15 //Number of received photons per bit for:  
16 printf("\n\n\t Number of received photons per bit  
   for :");  
17 // (a)ASK heterodyne synchronous detection  
18 Np=(erfinv(1-2*BER))^2*4/eeta; // erfc(x)=1-erf(x)  
19  
20 // Displaying the Result in Command Window  
21 printf("\n\n\t (a)ASK heterodyne synchronous  
   detection = %1.0f .", Np/2);  
22  
23 // (b)ASK heterodyne asynchronous detection  
24 Np=-log(2*BER)*4/eeta;  
25
```

```

26 // Displaying the Result in Command Window
27 printf("\n\n\t (b)ASK heterodyne asynchronous
           detection = %1.0 f .",Np/2);
28
29 // (c)PSK homodyne detection
30 Np=(erfinv(1-2*BER))^2/2; // erfc(x)=1-erf(x)
31
32 // Displaying the Result in Command Window
33 printf("\n\n\t (c)PSK homodyne detection = %1.0 f .",
           Np);

```

Scilab code Exa 13.4 Calculation of the minimum incoming power level

```

1 //Example 13.4
2 //Program to calculate the minimum incoming power
   level
3
4 clear all;
5 clc ;
6 close ;
7
8 //Given data
9 K=1;                                //CONSTANT FOR HETERODYNE
                                         DETECTION
10 Z=1;                                 //CONSTANT FOR FSK MODULATION
                                         SCHEME
11 eeta=1;                             // *100 percent - QUANTUM
                                         EFFICIENCY
12 Bt=400*10^6;                         //bps - TRANSMISSION RATE
13 BER=10^(-9);                         //BIT ERROR RATE
14 h= 6.626*10^(-34);                  //J/K - PLANK's CONSTANT
15 c=2.998*10^8;                        //m/s - VELOCITY OF LIGHT IN
                                         VACCUM
16 Lambda=1.55*10^(-6); //metre - OPERATING WAVELENGTH
17

```

```

18 //Minimum incoming peak power level
19 Ps=(erfinv(1-2*BER))^2*2*h*c*Bt/Lambda; // erfc(x)=1-
      erf(x)
20
21 // Displaying the Result in Command Window
22 printf("\n\n\t Minimum incoming peak power level is
      %0.1f nW or %0.1f dBm.",Ps/10^(-9),10*log10(Ps
      /(1*10^(-3))));

```

Scilab code Exa 13.5 Calculation of the absolute maximum repeater spacing for different ideal receiver types

```

1 //Example 13.5
2 //Program to calculate the absolute maximum repeater
   spacing for the
3 //following ideal receiver types:
4 //((a)ASK heterodyne synchronous detection
5 //((b)PSK homodyne detection
6
7 clear all;
8 clc ;
9 close ;
10
11 //Given data
12 Np=36;           //Average photons per bit -
   FROM EXAMPLE 13.3
13 h= 6.626*10^(-34); //J/K - PLANK's CONSTANT
14 c=2.998*10^8;    //m/s - VELOCITY OF LIGHT IN
   VACCUM
15 Lambda=1.55*10^(-6); //metre - OPERATING WAVELENGTH
16
17 //((a)ASK heterodyne synchronous detection
18 Np=36;           //Average photons per bit -
   FROM EXAMPLE 13.3
19 //For 50 Mbit/s Transmission Rate

```

```

20 Bt=50*10^6;           //bit/sec – GIVEN TRANSMISSION
    RATE
21 Ps=Np*h*c*Bt/Lambda;
22 Max_system_margin=4-10*log10(Ps/(1*10^(-3)));
23 Max_repeater_spacing=Max_system_margin/0.2;
24 //Displaying the Result in Command Window
25 printf("\n\n\t(a)ASK : Maximum repeater spacing for
    %1.0f Mbit/s transmission rate is %1.0f km.",Bt
    /10^6,Max_repeater_spacing);
26
27 //For 1 Gbit/s Transmission Rate
28 Bt=1*10^9;           //bit/sec – GIVEN TRANSMISSION
    RATE
29 Ps=Np*h*c*Bt/Lambda;
30 Max_system_margin=4-10*log10(Ps/(1*10^(-3)));
31 Max_repeater_spacing=Max_system_margin/0.2;
32 //Displaying the Result in Command Window
33 printf("\n\n\tMaximum repeater spacing for
    %1.0f Gbit/s transmission rate is %1.0f km.",Bt
    /10^9,Max_repeater_spacing);
34
35 // (b)PSK homodyne detection
36 Np=9;                //Average photons per bit – FROM
    EXAMPLE 13.3
37 //For 50 Mbit/s Transmission Rate
38 Bt=50*10^6;           //bit/sec – GIVEN TRANSMISSION
    RATE
39 Ps=Np*h*c*Bt/Lambda;
40 Max_system_margin=4-10*log10(Ps/(1*10^(-3)));
41 Max_repeater_spacing=Max_system_margin/0.2;
42 //Displaying the Result in Command Window
43 printf("\n\n\t(b)PSK : Maximum repeater spacing for
    %1.0f Mbit/s transmission rate is %1.0f km.",Bt
    /10^6,Max_repeater_spacing);
44
45 //For 1 Gbit/s Transmission Rate
46 Bt=1*10^9;           //bit/sec – GIVEN TRANSMISSION
    RATE

```

```

47 Ps=Np*h*c*Bt/Lambda;
48 Max_system_margin=4-10*log10(Ps/(1*10^(-3)));
49 Max_repeater_spacing=Max_system_margin/0.2;
50 //Displaying the Result in Command Window
51 printf("\n\n\t Maximum repeater spacing for
           %1.0f Gbit/s transmission rate is %1.0f km.",Bt
           /10^9,Max_repeater_spacing);

```

Scilab code Exa 13.6 Estimation of the minimum transmitter power requirement for an optical coherent WDM

```

1 //Example 13.6
2 //Program to estimate the minimum transmitter power
   requirement for
3 //an optical coherent WDM
4
5 clear all;
6 clc ;
7 close ;
8
9 //Given data
10 Np=150;           //photons per bit - RECEPTION
11 h= 6.626*10^(-34); //J/K - PLANK's CONSTANT
12 c=2.998*10^8;     //m/s - VELOCITY OF LIGHT IN
                      VACCUM
13 B_fib=20*10^12;    //Hz - OPTICAL BANDWIDTH
14 Lambda=1.3*10^(-6); //metre - SHORTEST WAVELENGTH
15
16 //Minimum transmitter power requirement for an
   optical coherent WDM
17 Ptx=Np*h*c*B_fib/Lambda;
18
19 //Displaying the Result in Command Window
20 printf("\n\n\t Minimum transmitter power requirement
           for an optical coherent WDM is %0.1f mW or %1.0f

```

```
dBm .” ,Ptx/10^(-3) , 10*log10(Ptx/(1*10^(-3))));
```

Chapter 14

OPTICAL FIBER MEASUREMENTS

Scilab code Exa 14.1 Determination of the attenuation for the fiber and estimation of accuracy of the result

```
1 //Example 14.1
2 //Program to determine the attenuation per kilometer
   for the fiber
3 //and estimate the accuracy of the result
4
5 clear all;
6 clc ;
7 close ;
8
9 //Given data
10 L1=2*10^3;           //metres - INITIAL LENGTH
11 L2=2;                //metres - FINAL LENGTH
12 V1=2.1;              //volts - INITIAL OUTPUT VOLTAGE
13 V2=10.7;             //volts - FINAL OUTPUT VOLTAGE
14
15 //Attenuation per Kilometer
16 alpha_dB=10/(L1-L2)*log10(V2/V1);
17
```

```

18 // Uncertainty in measured attenuation
19 Uncertainty=0.2/(L1-L2);
20
21 // Displaying the Results in Command Window
22 printf("\n\n\t Attenuation is %0.1f dB/km.",alpha_dB
   *10^3);
23 printf("\n\n\t Uncertainty in measured attenuation
   is +-%0.1f dB.",Uncertainty*10^3);

```

Scilab code Exa 14.2 Determination of the absorption loss for the fiber under test

```

1 //Example 14.2
2 //Program to determine the absorption loss for the
   fiber under test
3
4 clear all;
5 clc ;
6 close ;
7
8 //Given data
9 t1=10;           //s - INITIAL TIME
10 t2=100;          //s - FINAL TIME
11 Tinf_minus_Tt1=0.525; //From Figure 14.6
12 Tinf_minus_Tt2=0.021; //From Figure 14.6
13 C=1.64*10^4;    //J/degree C - THERMAL CAPACITY
   PER KILOMETER
14 Tinf=4.3*10^(-4); // degree C - MAXIMUM THERMAL
   TEMPERATURE RISE
15 Popt=98*10^(-3); //Watt - OPTICAL POWER
16
17 //Time constant for the calorimeter
18 tc=(t2-t1)/(\log(Tinf_minus_Tt1)-\log(Tinf_minus_Tt2))
   ;
19

```

```
20 //Absorption loss of the test fiber
21 alpha_abs=C*Tinf/(Popt*tc);
22
23 //Displaying the Results in Command Window
24 printf("\n\n\t Time constant for the calorimeter is
25 %0.1f s.",tc);
25 printf("\n\n\t Absorption loss of the test fiber is
26 %0.1f dB/km.",alpha_abs);
```

Scilab code Exa 14.3 Determination of the loss due to scattering for the fiber

```
1 //Example 14.3
2 //Program to determine the loss due to scattering
   for the fiber
3
4 clear all;
5 clc ;
6 close ;
7
8 //Given data
9 Vsc=6.14*10^(-9);           //V – OPTICAL OUTPUT
   POWER
10 Vopt=153.38*10^(-6);        //V – OPTICAL POWER
    WITHOUT SCATTERING
11 l=2.92;                     //cm – LENGTH OF THE
   FIBER
12
13 //Loss due to scattering for the fiber
14 alpha_sc=4.343*10^5/l*Vsc/Vopt;
15
16 //Displaying the Result in Command Window
17 printf("\n\n\t Loss due to scattering for the fiber
   is %0.1f dB/km.",alpha_sc);
```

Scilab code Exa 14.4 Calculation of 3 dB Pulse Broadening and Fiber Bandwidth Length product

```
1 //Example 14.4
2 //Program to calculate:
3 //(a)3 dB Pulse Broadening in ns/km
4 //(b)Fiber Bandwidth-Length product
5
6 clear all;
7 clc ;
8 close ;
9
10 //Given data
11 tau_o=12.6;           //ns - 3 dB width of Output
                           Pulse
12 tau_i=0.3;            //ns - 3 dB width of Input
                           Pulse
13 L=1.2;                //km - LENGTH
14
15 //(a)3 dB Pulse Broadening in ns/km
16 tau=sqrt(tau_o^2-tau_i^2)/L;
17
18 //(b)Fiber Bandwidth-Length product
19 Bopt=0.44/tau;
20
21 //Displaying the Results in Command Window
22 printf("\n\n\t(a)3 dB Pulse Broadening is %0.1f ns/
                           km.",tau);
23 printf("\n\n\t(b)Fiber Bandwidth-Length product is
                           %0.1f MHz km.",Bopt*10^3);
```

Scilab code Exa 14.5 Calculation of the Numerical Aperture of the fiber

```

1 //Example 14.5
2 //Program to calculate the Numerical Aperture(NA) of
   the fiber
3
4 clear all;
5 clc ;
6 close ;
7
8 //Given data
9 D=10;           //cm - SCREEN POSITION
10 A=6.2;          //cm - OUTPUT PATTERN SIZE
11
12 // Numerical Aperture(NA) of the fiber
13 NA=A/sqrt(A^2+4*D^2);
14
15 //Displaying The Results in Command Window
16 printf("\n\n\t The Numerical Aperture(NA) of the
   fiber is %0.2f .",NA);

```

Scilab code Exa 14.6 Determination of the outer diameter of the optical fiber in micrometer

```

1 //Example 14.6
2 //Program to determine outer diameter of the optical
   fiber in micrometer
3
4 clear all;
5 clc ;
6 close ;
7
8 //Given data
9 l=0.1;           //m - MIRROR POSITION
10 d_PHI_by_dt=4;    //rad/s - ANGULAR VELOCITY
11 We=300*10^(-6);  //us - WIDTH OF SHADOW PULSE
12

```

```

13 //Outer diameter of the optical fiber
14 d0=We*l*d_PHI_by_dt;
15
16 //Displaying the Result in Command Window
17 printf("\n\n\t The Outer diameter of the optical
    fiber is %1.0f um.",d0*10^6);

```

Scilab code Exa 14.7 Conversion of optical signal powers to dBm and dBu

```

1 //Example 14.7
2 //Program to:
3 // (a) Convert optical signal powers to dBm
4 // (b) Convert optical signal powers to dBu
5
6 clear all;
7 clc ;
8 close ;
9
10 // (a) Convert optical signal powers to dBm
11 Po=5*10^(-3);           //Watt – GIVEN OPTICAL POWER
12 dBm=10*log10(Po/1*10^3);
13 printf("\n\n\t (a)The %1.0f mW of optical power is
    equivalent to %0.2f dBm.",Po/10^(-3), dBm);
14
15 Po=20*10^(-6);          //Watt – GIVEN OPTICAL POWER
16 dBm=10*log10(Po/1*10^3);
17 printf("\n\n\t The %1.0f uW of optical power is
    equivalent to %0.2f dBm.",Po/10^(-6), dBm);
18
19 // (b) Convert optical signal powers to dBu
20 Po=0.03*10^(-3);        //Watt – GIVEN OPTICAL POWER
21 dBm=10*log10(Po/1*10^6);
22 printf("\n\n\t (b)The %0.2f mW of optical power is
    equivalent to %0.2f dBu.",Po/10^(-3), dBm);
23

```

```

24 Po=800*10^(-9);      //Watt – GIVEN OPTICAL POWER
25 dBm=10*log10(Po/1*10^6);
26 printf("\n\n\tThe %1.0f nW of optical power is
equivalent to %0.2f dBu.",Po/10^(-9), dBm);

```

Scilab code Exa 14.8 Calculation of the ratio of back scattered optical power to the forward optical power

```

1 //Example 14.8
2 //Program to calculate the ratio in dB of back
scattered optical
3 //power to the forward optical power at the fiber
input
4
5 clear all;
6 clc ;
7 close ;
8
9 //Given data
10 NA=0.2;           //NUMERICAL APERTURE
11 gamma_r=0.7*10^-3; //per m – RAYLEIGH SCATTERING
COEFFICIENT
12 Wo=50*10^(-9);    //s – PULSE DURATION
13 c=2.998*10^8;     //m/s – VELOCITY OF LIGHT IN
VACCUM
14 n1=1.5;           //CORE REFRACTIVE INDEX
15
16 //Calculated Ratio Pra(0)/Pi
17 Pra0_by_Pi=0.5*NA^2*gamma_r*Wo*c/(4*n1^3);
18
19 //Displaying the Result in command window
20 printf("\n\n\tPra(0)/Pi = %0.1f dB.",10*log10(
Pra0_by_Pi));

```
